ZINNTEC
70-6214

Metaflux®

Technical Data Sheet

DESCRIPTION:

Metaflux Zinntec is a bi-component body repair paste designed for use on materials such as aluminum, steel, zinc, GFK, and wood. It can be used in body repairs as a high-quality alternative to soldering putty. Our product is designed to offer superior protection against vibrations, shocks, and corrosion, as well as excellent resistance to weather and heat. Additionally, it is non-hygroscopic, meaning it hardens without shrinking and can be used at cold temperatures without thermal deformation, which avoids the need for disassembly.

Our advanced formula is resistant to gasoline, diesel, many types of oil, and diluted acids, making it an ideal choice for demanding industrial applications. It also has a strong resistance to flexion and adhesion and can be applied easily to vertical surfaces. The application of Zinntec body repair putty is simple and can be sanded easily and without dust after a short drying time. By using our product, you can be assured that your equipment and surfaces will remain protected and function optimally, even under the most challenging conditions.

USE DIRECTIVES:

Eliminate all oil, rust and dirt from surfaces with Metaflux 70-15. Make the surface slightly rough and it is recommended to mix well with a **maximum of 2 to 3%** of hardener, and to use it within 10 minutes of mixing. After 10 minutes, the surface can be worked with a tin file, and after approximately 20 minutes (whether dry or wet), it can be sanded with sandpaper. **Note:** Excess hardener does not speed up the hardening process, and if the 2-3% ratio is not respected, the quality may be affected.

PROPERTIES AND ADVANTAGES:

- Resistant to vibrations and shocks
- Resistant to gasoline, diesel, many types of oils, and diluted acids
- Non-hygroscopic, does not shrink as it hardens
- Resistant to weathering and corrosion
- No thermal deformation because it can be treated at cold temperatures, avoiding the disassembly of parts
- High heat resistance
- Easy to seal
- Can be sanded quickly and without dust after a short drying time
- Has strong adhesion and bending resistance
- Can be easily applied to vertical surfaces

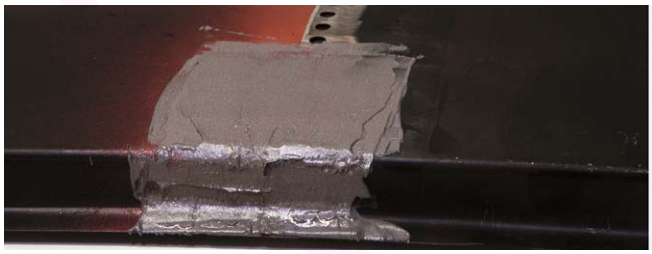

Content	Type	Art.-No	Box
1370g + 30g	paste	70-6214	1

1392, Avenue de la gare Mascouche (QC) Canada, J7K 2Z2
1-(888) 452-6382 (450) 477-3102 1-(450) 477-6664
www.ametasolution.com info@ametasolution.com

AMETA SOLUTION.COM