

PORTA

Macro

ORT

2024 PRODUCTS PRODUCTS CALABORATION CHEMICAL - LUBRICANTS - METALLIC COATINGS

PROTECTION - DEGREASERS - SOAPS

PATE DE ZINC ZINC PASTE

AMETH

AMETE

Metaflux

UALU-ZINC

Metallpin (Gleitm Korros

t

ANTI-S

ADVANCED SOLUTIONS FOR SURFACES

AMER

AMEIA



THE BEST OF EUROPEAN AND AMERICAN BRANDS FOR NORTH AMERICA

The triumphant march of the new aerosol technology began in Europe in 1955, with the first businesses being established specifically to manufacture sprays. For the next 20 years, this new sector concentrated on putting existing liquids and active ingredients into spray cans.

In 1975, the Swiss company METAFLUX AG brought out a completely new design of spray, one which for the first time ever enabled problem-free coating of steel with zinc, achieving quality levels that exceeded all international standards.

In the years that followed, METAFLUX took the development of metallic sprays further, using aluminium, stainless steel, brass, copper and titanium for surface coating and also developing metal-containing lubricating pastes. At the same time, the German METAFLUX sales organisation TECHNO-SERVICE GmbH in Bielefeld was being developed; the company has steadily adapted its office and storage areas to the expanding capacity requirements of its domestic and export busi-ness.

As recently as 2007, the logistics centre was expanded to accommodate an additional 150 pallet bays. Today, two aerosol factories affiliated with METAFLUX AG apply their experience, gained from over 50 years and an annual capacity of 60-70 million cans, to ensure consistently high quality.

The METAFLUX product range comprises over 75 sprays developed in-house, and every year sees fresh innovations added to it. But one constant in all METAFLUX development is the emphasis placed on these three principles:

- The highest possible technical quality
- The lowest possible air contamination in the work-place
- Maximum consideration for the environment

Strict respect for these principles guarantees that METAFLUX sprays will continue to be an internationally leading product range going forward.

The combination of German and Swiss production and marketing companies creates an international brand with an emphasis on three principles worldwide:

- The highest possible technical quality
- A comprehensive production programme
- Individual customer advice and support

Metaflux products repay the investment many times over. Experience our high standards for yourself, and draw inspiration from this catalogue for any of the following:

Metallic coatings • Lubricants • Multifunction sprays • Welding protection • Upkeep • Maintenance • Cleaning

We are pleased to offer on-site advice and assistance – just call us in! Our outstandingly- trained technical consultants will be pleased to present our full range of products to you naturally, without obligation.

The principle behind the spray can...

The principle behind the spray can is as • For efficient use of the product: the ver- The gas phase inside the can also serves simple as it is inspired: using the internal tical feeder tube running down the pressure of the spray can, its contents base against the inner wall of the can are released as an aerosol precisely at is able to reach the very last drops of the the time you press on the button.

of the active ingredient (the actual product) the metal container: the valve and spray and the liquid propellant inside the spray head are responsible for "atomising" the can: for this, one part of the propellant is product and for precise dosing. dissolved in the active ingredient, and a second part sits as a gas like a "pressure The spray head is provided with a pad" above the ingredient-propellant protective cover. The valve body is mix.

If the button is depressed, the gas can. It extends down to the base and propellant forces the contents through ensures that the can is emptied the valve to the outside. At that instant, completely and evenly. the propellant vaporizes in fractions of a second, and the active ingredient that is left behind is distributed very finely and evenly - just the way the user needs to have his product.

The fineness of these drops is only achieved using spray cans: the active ingredient is applied finely, economically and evenly and dries rapidly. Pump sprays cannot achieve these unique properties of aerosols, and are therefore unsuitable for many products.

How a spray can is assembled?

The basic component is generally a metal container: the actual spray can itself, in tinplate or aluminium. The base of this can is concave, for two reasons:


 For safety reasons: if overpressure is generated due to the strong influence of heat, it allows the base to bend outwards and thus alleviate the pressure. It means that the integrity of the spray can is not compromised despite the overpressure.

product when the base itself is concave. The valve, the spray head and the pro-The secret of how it works lies in the mix tective cover are located at the top of

> connected to a vertical feeder tube leading into the inside of the spray

as an expansion space. This ensures that the filled aerosol can can even with-stand temperatures up to +50 °C. An essential element in aerosols is the liquid propellant or propellant gas, since this generates the pressure needed for spraying.

And ultimately, the even the most sophisticated design would be nothing without the product. The active ingredient which is intended for spraying is similarly in liquid form and is mixed with the propellant or propellant gas in the can.

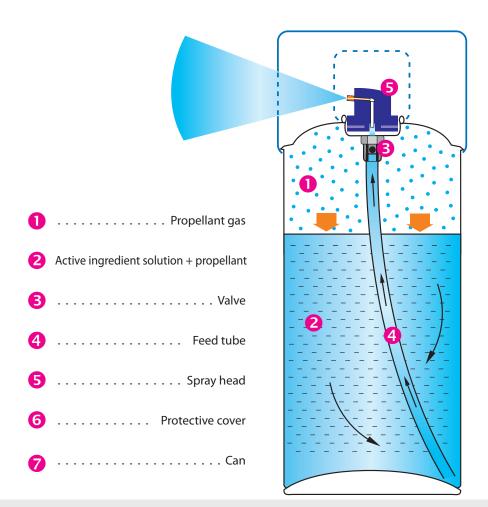

IMPORTANT NOTICE: All information in this brochure is based on our extensive experience, gained over many years, in the manufacture of chemical products and their application. It is also based on external and internal testing in laboratories and in practical tests conducted in-house. Due to the variety of the products and their range of possible uses, we recommend that in the specific instance the proposed application is as-sessed on the basis of your own operational experience. Technical data sheets and safety data sheets are available for all products, in each case reflecting the latest knowledge and understanding. Further to this, there are corresponding recommendations on each individual product pack. Due to the range of possible applications, neither the manufacturer nor the marketing companies domestically or in other countries give a guarantee either expressly or tacitly as to particular outcomes from use of the product and the durability of same, or for the product lifetimes.

METALLIC COATING

• Since 1955 Metaflux represents worldwide the maximum expression of aerosol and paste metallic coating technology with the lowest possible environmental contamination

• Metaflux was the first company in the world to produce zinc in aerosol

• Pure zinc, aluminum, copper and brass in suspension provide compelling quality coatings exceeding all international standards

 99% pure zinc in aerosol or paste suspension represents the best available long-term metallic protection against corrosion ever

• Since 1975 Metaflux metallic coating spray cans work all the time with no purging necessary



ZINC PASTE Cold galvanizing compound

Being the creator of galvanizing and recognized worldwide since 1955, Metaflux Zinc Paste is a high quality coating with a dry film purity of (96% + -1%) and (98.5% -99%) pure Zinc, thus providing cathodic protection against corrosion especially exposed to the climate and extreme weather conditions. Zinc is the only coating offering double protection to steel, barrier protection and galvanic protection.

Metaflux offers the format of 500g. (70-4050) and the 1 kg format with an integrated brush (70-4002) the only company in the world to offer these options. Also providing 1 kg (70-4001) 10 kgs (70-4010) and spray (70-45)

Metaflux is unquestionably the leader in the field of long-term corrosion protection and was the first company to manufacture aerosol zinc. This product has been specially designed for retouching galvanized parts and protecting metal surfaces. Used in the following fields: Agricultural Machinery - Port Facility - Deck Structures - Stair ramps and many more.

PROPERTIES:

- · Can be used as a single coating or repainted.
- · Same advantages as conventional galvanizing.
- \cdot Can be diluted with the product 70-6301 thinner.
- \cdot Waterfroof, bonded and resistant product.
- · Resistant to temperatures up to 800°C.
- · Mat Gray color no. 16314 (Standard FED-STD-595B)
- · Resistant to salt, salt water, acid rain and corrosion.
- · Quickly dries and can be applied in a single layer up to 150µm. · Zinc paste from Metaflux is distilled to eliminate lead.
- · Can be applied on an old galvanization previously cleaned

RECOMMENDED APPLICATION CONDITIONS:

Ambient temperature (minimum - 5°C) (maximum 40°C) We recommend the use of a solvent (White Spirit) for application at temperature between -5 °C to +5°C

Brush application - roller or spray gun. Shelf life: 1 year open jar / closed jar 3 years.

STANDARDS:

Meets the many requirements of the standards ASTM such as: ASTM 780 - ASTM 780-1 - ASTM B117 - ASTM 123 NATA Standards MSN 7520-99-212-4616. Product approved by the MTQ and GUF 0412. European GMP standards. Standards CN / CGSB.1.181 (withdrawn). Hydro Quebec (A2 / SN.31.101) Metaflux meets ISO 9001- ISO 3549 and ISO 1461 standards. Meets the standards DIN 50.976 (1980)

This information is based on the best of our knowledge and is credible. Because we have no direct or ongoing control over the manner in which the product is used/applied, it does not engage the responsibility of the manufacturer for its completeness, accuracy, and results of its use.



Content	Туре	ArtNo	Dry film zinc content	Zinc purity	Temperature Resistance	(100µm)cover	Dry touch & complete	*
400ml.	Aerosol	70-45	93% (+/- 1%)	98.5 - 99%	+120°C	8 m² (86 ft²)	8-11 min / 24 hre	12
1kg.	Pot	70-4001	96% (+/- 1%)	98.5 - 99%	+800°C	2.5 m² (27 ft²)	10 min / 24 hre	25
1 kg.	Pot/brush	70-4002	96% (+/- 1%)	98.5 - 99%	+800°C	2.5 m ² (27 ft ²)	10 min / 24 hre	25
10 kg.	Pot	70-4010	96% (+/- 1%)	98.5 - 99%	+800°C	25 m² (269 ft²)	10 min / 24 hre	1
1 I.	thinner	70-6301	N.A.	N.A.	N.A.	N.A.	N.A.	12

Color sample







70-45 ZINC-SPRAY

ZINC COATING - CORROSION PROTECTION

COLD GALVANISATION									
Content	Туре	ArtNo	Dry film zink content	Zink purity	Temperature resistance	8			
400 ml	spray can	70-45	93% (+/- 1%)	98.5 - 99%	+120°C	12			
	ALL REAL PROPERTY OF ALL REAL								
	•Com		potable water areas 150.976 norm for to 5		Color sample				


70-46 GALV-APPRÊT



ZINC COATING - CORROSION PROTECTION

COLD GALVANISATION

Content	Туре	ArtNo	Dry film zink content	Zink purity	Temperature resistance	*
400 ml	spray can	70-46	91% (+/- 1%)	98.5 - 99%	+140°C	12



COLDGALVANISATION

- Fast drying, Firm bond • Smooth surface finish, Waterproof
- 400 ml [13.52 fl.oz] may coat up to 8 m² [86 ft².]
- DIN EN ISO 3549:2002

Color sample

79-06 **PORTA ZINC**

ZINC COATING - CORROSION PROTECTION

Content	Туре	ArtNo	Dry film zink content	Zink purity	Temperature resistance	
400 ml	spray can	79-06	90% (+/- 1%)	98.5 - 99%	+140°C	1
	A				11/1/2	
	• Fast • Ecor	-corrosion zind drying nomical in use be top coated		etallic surfaces	Provide and	

70-38 **GALVA PROTECT**

Metaflux GALVA-PROTECT

GALVANISATION PROTECTION

UNIQUE WATER-BASED PRODUCT						
Content	Туре	ArtNo	Temperature resistance	*		
1 kg.	pot	70-38	+ 800°C	12		



- Quick drying within approx. 2 hours
- No flammable
- One single application is enough
- Easily removed by wire brushing
- Does not interfere with the galvanizing process



70-43 ZINC SHEEN

QR codes on any smart phone.

Scan the QR code of the product to see the technical data sheet and much more information. You can download the app(free) that can read



ZINC-ALU COATING - CORROSION PROTECTION

HOT GALVANISATION

Content	Туре	ArtNo	Dry film zink content	Zink purity	Temperature resistance	*				
400 ml	spray can	70-43	90% (+/- 1%)	98.5 - 99%	+140°C	12				
	appea • Opti • Com • Colo mater • 400	arance mal mix, can be pound color ma ring matches v rial base. ml [13.52 fl.oz.]	rosion-proof zinc coa e applied at any time atches with hot-dippe vith the aging proces may coat up to ng to layer thickness	ed galvanized parts ss of the	Color sample					

70-42 **ZINC-ALU**



ZINC-ALU COATING - CORROSION PROTECTION

HOT GALVANISATION

HOT GALVANISATION

at any time

Content	Туре	ArtNo	Dry film zink content	Zink purity	Temperature resistance	*
400 ml	spray can	70-42	83% (+/- 1%)	98.5 - 99%	+140°C	12
	alumir appea • 400 n [86 ft ² , • Dryin enviro	num for shiny rance. nl [13.52 fl.oz.]] according to ig time: 4-6 m nmental hum	n-proof zinc coating finish like hot dip gal may coat up to 8 m ² layer thickness inutes according to so idity r 8-12 minutes	vanized	Color sample	

70-41 ALU-ZINC PASTE



ZINC-ALU COATING - CORROSION PROTECTION

Content	Туре	ArtNo	Dry film zink content	Zink purity	Temperature resistance	e 🎲
1 l.	pot	70-4101	83% (+/- 1%)	98.5 - 99%	+500°C	12
10 l.	pot	70-4110	83% (+/- 1%)	98.5 - 99%	+500°C	1
1 l.	thiner	70-6301	N.A.	N.A.	N.A.	12
 Brush-on read Compound wit shiny finish like Immediately No capillary of 	h high alumi hot dip galv drying throi	num content f anized appea ugh O2 expos	for high airless spra rance when usin sure	ly conductive, No aying 1g nozzle size 4 or 1.80 fl.oz] may coa	5	ed for

when using nozzle size 4 or 5





ZINC-ALU COATING - CORROSION PROTECTION

HOT GALVANISATION										
Content	Туре	ArtNo	Dry film zink content	Zink purity	Temperature resistance	*				
400 ml	spray can	79-01	79% (+/- 1%)	98.5 - 99%	+140°C	12				
	Mad • A un • Prote • Suita • Good • Quic	le of ultra-brilli ique mix of zin ects metallic su	ic, aluminum and res irfaces from corrosio ups on galvanized su	sins n	Color sample					



79-01 ZINC COMBI





70-56 SST SPRAY



SST- CORROSION PROTECTION

SHINY FINISH											
Content	Content Type		Dry film SST content	Alloys	Temperature resistance	*					
400 ml	spray can	70-56	62%	16% Cr / 10% Ni/ 3% Mo/ 2% Mn	+300°C	12					
	stainle • The c combi steel a • High • Alloy	ess steel content a corrosion-resistan ines the benefits illoy with those o ly resistant to acid	nt stainless steel coatir of the high stainless f the weatherproof ar	ng tificial resins	Color sample						

70-78 SST FINISH

SST - CORROSION PROTECTION SHINY FINISH

Content	Туре	ArtNo	Drying	Cover	*
400 ml	spray can	70-78	fast	6 -8 m² [64-86 ft².]	12
	steel s • High • Fast	osion-resistant and waterpro surface coating for a shiny fir ily abrasion-resistant drying ml [13.52 fl.oz.] may coat up 5 ft ² .]	nish	Color sample	

70-16 ALUMINIUM SPRAY



ALUMINUM - CORROSION PROTECTION

SHINY FINISH

Content	Туре	ArtNo	Dry film alu content	Alu purity	Temperature resistance	*
400 ml	spray can	70-16	99.5%	+800°C	12	
	finis • Anti • Elec • Ther • 400	sh and cathodi -corrosion pro trically conduc mic diffusion	minum lamina for sr c stection up to +800°(ctive (spot welding) on steel from +825°(.] may coat up to 8-1	C [+1 470°F] C [+1 520°F]	Color sample	

70-52 ALUMINIUM SPRAY



ALUMINUM - CORROSION PROTECTION

Content	Туре	ArtNo	Dry film alu content	Alu purity	Temperature resistance	*			
400 ml	spray can	70-52	99.5%	99.5%	+800°C	12			



SHINY FINISH

• Extremely abrasion-resistant aluminum coating for the protection of surfaces subject to frequent manipulation or contact Inhibits corrosion • Thickness at +20°C [+68°F] = 0.655 g/cm³ [0.38 oz./ in³] • 400 ml [13.52 fl.oz.] may coat up to 4-5 m² [43-54 ft²]



Color sample



much more information. You can download the app(free) that can read QR codes on any smart phone.

Scan the QR code of the product to see the technical data sheet and

70-18 CHROMAL SPRAY



CHROMAL - FINITION

CHROMAL FINISH LOOK

CINOMAL					
Content	Туре	ArtNo	Thickness at 20 ° C	Temperature resistance	*
400 ml	spray can	70-18	0.655g/cm ³	+400°C	12
	• Prod • Exce • Thicl [0.38 • 400	allic shiny coating for surf luct for professional use o llent coverage kness at +20°C [+68°F] = oz./in ³] ml [13.52 fl.oz.] may coat 08 ft ² .]	only 0.655 g/cm ³	Color sample	

WELD-COPPER SPRAY 70-49

SHINY FINISH

700	_	-	1
	u-uu	PPER.	
1000	types of a	citing .	
	Transa and all		ant o
	A state of the local division of the local d		
		~	No. of Contract
		\lor	Colory
	mars 400) ml	
		and the second	
		(de ser	

Content Type Art.-No Density Color Cover 0.66 g/cm³ to 20°C 8 -10 m² 86-108 ft². 400 ml 70-49 12 spray can copper Copper in suspension for real high density copper coating Recommended for spot welding operations Abrasion-resistant Bonds with any metal and solid surfaces Suitable for installation and decoration works • Economical in use Color sample

• 400 ml [13.52 fl.oz.] may coat up to 8-10 m² [86 -108 ft².]

70-57 COPPER SPRAY



COPPER - FINITION

COPPER - FINITION

Content	Туре	ArtNo	Dry film copper content	Temperature resistance	Cover	۲
400 ml	spray can	70-57	56%	+800°C	8 -10 m ² 86-108 ft ² .	12
	densi • Higł • Exce • 400	ty copper coa content of co ellent conduct	opper in the dry film		Color sample	

BRASS SPRAY 70-58

Metaflu



Content	Туре	ArtNo	Dry film brass content	Temperature resistance	Cover	
400 ml	spray can	70-58	67%	+800°C	8 -10 m ² 86-108 ft ² .	12



 Brass in suspension for real high density brass coating • High content of brass in the dry film • 400 ml [13.52 fl.oz.] may coat up to 8-10 m² [86 -108 ft².]





SHINY FINISH

SHINY FINISH

Color sample



CORROSION PROTECTION

• Metaflux corrosion protection products are made to provide metal surfaces with a permanent shield against corrosive agents

• The active process of Metaflux corrosion protection products converts rust into a stable compound, thus allowing the treated surfaces to be top coated with no risk of new corrosion

• Unique time saving products, like Metaflux Rust-Safe Spray 70-37 and 70-44, represent examples of advanced solutions against corrosion with direct application onto rust

• The range of products offers specific protection solutions in aerosol or liquid for tools and machinery in storage or for overseas transportation

Salt spray test results available for rust-neutralizing products



70-37 RUST-SAFE RED

AIRPROOF BARRIER AGAINST RUST

AIRPROOF BARRIER AGAINST RUST



RUST-SAF	E RUST BA	RRIER		
Content	Туре	ArtNo	Salt spray test	Temperature resistance
400 ml	spray can	70-37	600 Heures	+120°C 12
	for me •Excel •Good •Can b	ary and secondary corre etal surfaces lent adhesion to clean o d penetration on welded be top coated with any ly resistant to acids and	or rusty surfaces d areas paint or varnish	
回欲辞	• Good	d UV stability, Airproof tant to water infiltratior		Color sample

RUST-SAFE GREY 70-44

letaflu

RUST-SAFE RUST BARRIER

Content	Туре	ArtNo	Salt spray test	Temperature resistance	*
400 ml	spray can	70-44	600 Heures	+120°C	12
	for me • Excell • Good • Can b • Highl	ary and secondary corrosion prote etal surfaces lent adhesion to clean or rusty su l penetration on welded areas se top coated with any paint or va y resistant to acids and alkalis I UV stability, Airproof	rfaces	Color sample	

70-63 **TS-400 GREY**

AIRPROOF BARRIER AGAINST RUST

AIRPROOF BARRIER AGAINST RUST

RUST PROTECTION

Content	Туре	ArtNo	Temperature resistance	*
1 kg.	pot	70-6300	15° to 28°C	12
5 kg.	pot	70-6305	15° to 28°C	2
1 l.	Diluant	70-6301	N.A.	12

Color sample

- Fast drying protective primer for all metals
- Provides reliable and permanent protection
- of the treated surface
- · Bonds with any blank metal surface

RUST CONVERTOR

· Can be top coated with enamel varnish

70-35 ROST-I-SOL



Content	Туре	ArtNo	Temperature resistance	\$	
400ml.	Spray can	70-35	+175°C	12	
500ml.	pot	70-3550	+175°C	12	

• 90 μ m layer consumption rate 1 kg = 4-5 m² [2.20 lbs. = 43-54 ft².]

- · Lead-free, no-caustic patented brush-on rust neutralizer
- Can be safely cleaned after drying
- Works well on moistened rust
- Can be welded over at any time
- Does neither attack nor damage any painted or zinc surfaces
- 500 hour salt spray test according to DIN 50021 certified









70-39 CORROSION PROTECTOR WAX



AIRPROOF BARRIER AGAINST RUST

CIRE DE PROTECTION POUR ENTREPOSAGE

Content	Туре	ArtNo	thickness	séchage	*
400 ml	spray can	70-39	0.63 g/cm ³	70min.	12
	agai • Pern atm • Wate • High	g-term protection for all inst corrosion and oxida nanent elastic protective ospheric influence caus er-repellent n capillary effect Ilent adhesion to all me	tion e film protecting from ing oxidation	TOT IN CERTIFICATION	

75-64 KOWA PROTECT WAX

AIRPROOF BARRIER AGAINST RUST



LONG-TERM PROTECTION WAX

Content	Туре	ArtNo	Temperature resistance	drying	Cover	\$	
4 I.	pot	1 I. cov					
20 l.	pot	75-6420	-40 to +180°C	70min.	approx. 15 m ²	1	
	• Fast- • Does • Can l protee	s not attract du	-adhesive when dry ist dipping bath to es		A DE		



MULTIFUNCTION PRODUCTS

5 IN 1: PROTECTS - PENETRATES - LUBRICATES - DEHYDRATES - MAINTAINS

Extended range of applications when protecting, loosening, lubricating, dehumidifying and maintenance is required. Clean the part and apply the product. If necessary, remove residues with a cloth afterwards. Highly recommended for air gun and rifle maintenance. Prevents grass accumulation on lawn mowers. Excellent for lubricating aluminum for trouble-free punching operations.

Cor	ntent	Туре	ArtNo	Thickness	Temperature resistance	dielectric	8
40	00 ml	spray can	70-17	0.718 g/cm ³	+130°C	N.A.	12
50	00 ml	spray can	70-1750	0.718 g/cm ³	+130°C	N.A.	12
	1 I.	pot	75-3301	0.718 g/cm ³	+130°C	56 000 Volts	12
4	4 I.	pot	75-3304	0.718 g/cm ³	+130°C	56 000 Volts	4
2	20 I.	pot	75-3320	0.718 g/cm ³	+130°C	56 000 Volts	1

ADVANTAGES:

- High performance multifunction spray
- Does neither attack plastic, rubber, fabrics nor paints
- Silicone-free
- Petroleum-free
- Available in spray can, tin and barrel
- Dielectric up to 56.000 Volts
- (bulk liquid 75-33 ONLY)
- Works as lubricant compliant to VG 3 standard



Content	Туре	ArtNo	Density	Temperature resistance	¥
400 ml	spray can	70-47	0.67 g/cm ³ at 20°C	-50°C to +120°C	12
500 ml	spray can	70-4750	0.67 g/cm ³ at 20°C	-50°C to +120°C	12

Extremely wide-range spray to be applied as protection film with capillary effect and dehumidifier for electric connections and systems. Can be safely applied on plastic parts, electric wires and connections, bolts and nuts as an anti-seize and corrosion proof-protection. Recommended as prevention against heavy and light winter frost on any door locks.

Benefits

• 5 highly performing products in 1: spray for electric connections, viscosity spray with capillary effect, dehumidifier for electric systems, anti-corrosion protection, preventive frost protection

- Prevents current leak in humid areas
- Provides ultra-thin viscosity to protect from corrosion
- Acts specifically to prevent formation of oxidation and sulphide layers on electric wires and connections
- Loosens seized bolts and nuts, Silicone-free, Penetrates below the water
- Prevents formation of frost in any locks, i.e. buildings, cars, trucks, mailboxes, etc.
- Does not attack neither fabric, rubber nor paints







70-97 IMPREGNATION SPRAY

WATERPROOFING PRODUCT

DURABLE PROTECTION AGAINST WATER

Contenu	Туре	ArtNo	Color	*
400 ml	spray can	70-97	transparent	12



Effective professional waterproofing product for the impregnation of textiles, fabrics and leather. Durable protection, preserves surfaces. Improves the strength of the materials by protecting them from damage caused by water. For waterproofing: Clothing: work clothes, anoraks, parkas, vests, suits, overalls, ties, pants, blouses, canvas shoes, suede and leather boots, rain-wear, ski wear, sports and leisurewear, briefcases and satchels.



70-19 PROTECT SPRAY

Netafi

REPELS DIRT

Content	Туре	ArtNo	Temperature resistance	۲
400 ml	spray can	70-19	+100°C	12



Transparent coating
 Smooth surface

TRANSPARENT PROTECTION

- Smooth sur
- Repels dirt
- Permanently elastic
- No discoloration if heated or exposed to UV rays
- Does not alter thermal conductivity



70-05 TORSION SPRAY

ION-SPRA





Content	Туре	ArtNo	Dry in	capillarity	\$
400 ml	spray can	70-05	10 min.	high	12
	• The ingre • Acid • No r	emely high capillary action slightest tolerances allow the active dients to penetrate and grease-free esidues left after approx. 10 minute be top coated after approx.		CONCEPTION OF	

• Can be top coated after app 10 minutes from application

70-08 SUPER DEGRIP

LOOSENERS WITH ANTI-CORROSION

• Its contraction effect (chemical cracking) by cooling

 SPECIAL PENETRATING SPRAY WITH LUBRICATING ACTION

 Content
 Type
 Art.-No
 Thickness
 Temperature resistance
 >

 400 ml
 spray can
 70-08
 0.803 g/cm³
 +60°C
 12

 Image: Special constraint of the spray constraint of the spray adding lubrication with rust protection additives
 Image: Special constraint of the spray constraint of the spray adding lubrication



Little quantity required, Leaves no

- deposit of solid particles
- Does not attack painted surfaces
- The lubrication provided by the spray eliminates the
- need for additional lubricating

treatments with other products






70-14 LEAK SEEK SPRAY

SEAL CHECK SPRAY

FOR ALL GAS FEEDING SYSTEMS

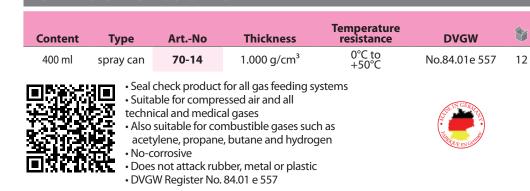

70-98 CRACK TESTING

CRACK DETECTION SPRAYS

spray can

spray can

	traffice.	
	And Thurs	
	0	
Θ		

C	RACKS AND D	EFECTS SEEK				
	Content	Туре	ArtNo	Action	¥	밇꺯
	400 ml	spray can	70-9801	cleaner	12	

70-9802

70-9803

contrastor

revelator

12

12

79-08 **FREEZE SPRAY**

FREEZE SPRAY

 All sprays are free of corrosive components • Compliant with the following norms: • DIN 54 152, MIL-SPEC I-25135D, LTF 6850 Lloyds Register of shipping
 Dutch Central Bureau Bureau Veritas • German Llyod • Reactor construction

400 ml

400 ml

INSTANT COOLING ACTION

	1	A -
Freeze S 79-6	ioray N	
		30 32
eres Bellevis 4	Im 00	-
	ALL	
		An one see a second and the second second and the second second and the second second and the second second second and the second second second and the second second second and the second second second second and the second se

Content	Туре	ArtNo	Thickness	¥
400 ml	spray can	79-08	0.56 g/cm ³	12



Economical freeze spray with instant cooling action lowering spot temperature down to -40°C [-40°F]. No odor, Safe to use on most surfaces except plastics. Removes gum and tar from cloth. Localizes faults in electrical components. Great for testing thermostats.







• Metaflux lubricants provide outstanding lubrication and protection against corrosion all-in-one

• Metaflux titanium-based lubricant for metal in aerosol 70-81 or paste 70-85 with temperature resistance within a range of -180°C [-356°F] up to +1 350°C [+ 2 462°F], represents worldwide a unique lubricant solution for high tech civil and military engineering

 Special lubricants enriched with PTFE flakes or based on special advanced formulations provide the right choice for clean industrial and professional lubrication

• With its 51 189 psi pressure resistance, Metaflux moly spray 70-82 represents an example of compelling anti-seize assembly lubricant when extreme loads are involved

• Each lubricant is available in a high quality aluminum packaging



METAL LUBRICANT

METAL PASTE LUBRICANT HIGHEST QUALITY

Content	Туре	ArtNo	Pressure resistance	Temperature resistance	\$
400 ml	Aerosol	70-81	2 400 kPa/cm ²	-180°C to +1 350°C	12
100ml.	gun	70-8501	2 400 kPa/cm ²	-180°C to +1 350°C	2
4 g.	bag	70-8508	2 400 kPa/cm ²	-180°C to +1 350°C	2
350 g.	pot	70-8535	2 400 kPa/cm ²	-180°C to +1 350°C	25
1 kg.	pot	70-8510	2 400 kPa/cm ²	-180°C to +1 350°C	6

Description: Improves the replacement of moving parts on CNC and milling machines. Prevents wear out, seizing and corrosion of mechanical connections, sliding parts bearing extreme loads (i.e. forklifts), reduces vibration noises (e.g. squeaking of breaks), allows removal of nuts on a damaged threading by remodeling the same. Maintains all metal and steel parts stable in volume and protected against variations induced by cold and heat. Highly recommended for all industrial fields, automotive, civil and military sea ports, water sewage plants, power plants, hospitals, civil and military constructions and installations, etc. Excellent on stainless steels.

Benefits:

Unique industrial heavy duty metal lubricant based on titanium to secure

- Abrasion-resistant
- No-flaking if exposed to continuous heat or rinsing
- Prevents galvanic contact corrosion
- Nickel, copper and aluminum-free with no possibility

of electrolyte formation



TITANIUM METAL LUBRICANT

70-85 / 70-81



70-82 ANTI-SEIZE

QR codes on any smart phone.

* Scan the QR code of the product to see the technical data sheet and much more information. You can download the app(free) that can read

< METAL LUBRICANT

PREVENTS WEAR OUT

Content	Туре	ArtNo	Pressure resistance	Temperature resistance	Corrosion protection	8
400 ml	spray can	70-82	3600 kPa/cm ²	-80°C to +2192°C	yes	12

High performance assembly and separation lubricant containing metal



pigments to protect against seizing and formation of corrosion • Highly resistant to saltwater, oil, organic solvents,

most acids and lye

Aluminum-free

Friction-resistant metallic film providing a reliable

anti-corrosion barrier



70-86 CERAMICS SPRAY



METAL LUBRICANT

WHITE SEPARATING AGENT

Content	Туре	ArtNo	Pressure resistance	Temp. Resistance	Abrasion resistance	۲
400 ml	Spray can	70-86	22 000 N/cm ²	+ 1 200°C	high	12



White separating agent and sealant
Abrasion-resistant

No-flaking

• Resistant to rinsing, water, oil, petrol, most acids and lye

- Prevents electro-chemical corrosion
 - Secures easy disassembly after long time





70-76 META LUBE II

Metallux

META-LUBE II

< METAL LUBRICANT

CLEAR GREASE SPRAY Content Type Art.-No Thickness Temperature resistance Color Image: Color state 400 ml spray can 70-76 0.600 g/cm³ $^{-20^\circ$ C to $+120^\circ$ C colorless 12



Lubricant spray with active ingredients based on special grease for any high precision technology application
No dripping
Colorless and clean



70-83 DRI-LUBE



Colorless and c Water-resistant Skin friendly

Skin friendly

C DRY LUBRICANT

Content	Туре	ArtNo	Pressure resistance	Temperature resistance	Based	\$
400 ml	spray can	70-83	0.625 g/cm ³	-120°C to +460°C	MoS2	12



Dry lubricant based on MoS2
Basis for a maintenance-free running-in lubrication on machines and mechanical parts
Clean friction coating, corrosion protection
Constant friction coefficient
Extremely pressure-load resistant

• Maintains its high lubricating capacity even after very long time from last application





70-88 CHAIN CLING SPRAY

CLING S

CHAIN LUBRICANT

EIIIIV SVNTHETIC LUPPICANT

FULLYSY	NTHETIC LU	JBRICANT			
Content	Туре	ArtNo	Pressure resistance	Temperature resistance	*
400 ml	spray can	70-88	0.683 g/cm ³	-15°C to +250°C	12
	• Excell • No dr • No eff • Chem • Silicol	synthetic lubricant for high speed lent penetration and adhesion ipping fect on regular O-rings nically stable ne-free parent corrosion protection up to		COLUMN GERTAR	

70-07 CHAIN SPRAY



CHAIN LUBRICANT

WHEELSET & CHAIN SPRAY

Content	Туре	ArtNo	Pressure resistance	Color	8							
400 ml	spray can	70-07	0.685 g/cm ³	noir	12							
IN ALVIN	• Dark	colored lubricant spray for i	• Dark colored lubricant spray for industrial									



- heavy duty chains and toothed wheels
- Bonds firmly with no dripping
- Resistant to water, waste water and aggressive agents
- Does cope with extremely heavy pressure loads
- Provides excellent protection against wearing and corrosion.
- Does not contain chlorine or heavy metals.

•Ideal for high and low temperatures applications (tested at -20 °C).

70-25 **METAFLON**

PTFE LUBRICANT

HEAVY DUTY LUBRICANT

Content	Туре	ArtNo	Density	Temperature resistance	8
400 ml	spray can	70-25	0.67 g/cm ³	-50°C to +100°C	12
100 ml	spray can	70-2501	0.67 g/cm ³	-50°C to +100°C	12



 Good flow capacity Prevents freezing up

Bonds firmly with no dripping

Eliminates grating and squeaking noises
Does neither attack rubber nor painted surfaces

High performance lubricant spray with PTFE

Penetrates below the moisture

70-87 PTFE-100

TFE 100



SYNTHETIC LUBRICANT 100% PUF Dry film Tomporatur

Content	Туре	ArtNo	PTFE content	resistance	
400 ml	spray can	70-87	100%	-60°C to +260°C	12



 Anti-stick lubricant spray for clean 100% pure PTFE coating Clean and colorless

- Grease-free, Firmly adheres to surface
- Dust, dirt and water repellent
- Resistant to oil, water and other liquids



19

ent	Туре	ArtNo	Density	Temperature resistance
ml	spray can	70-25	0.67 g/cm ³	-50°C to +100°C
ml	spray can	70-2501	0.67 g/cm ³	-50°C to +100°C



Scan the QR code of the product to see the technical data sheet and much more information. You can download the app(free) that can read QR codes on any smart phone.

70-89 HT-SUPER SPRAY + PTFE



VITE LUBRICANT

HIGH STRAIN RESISTANT LUBRICANT

Content	Туре	ArtNo	Thickness	Temperature resistance	\$
400 ml	spray can	70-89	0.683 g/cm ³	+30°C to +200°C	12
inese:	•High	ı strain resistant lubricant	spray enriched with PTFE		



flakes Prevents seizing and corrosion

Optimal coverage

Secure and fast adhesion

• Resistant to thinned lye, acids and corrosive industrial

environments.

79-03 PORTA SILICON spray

SILICONE LUBRICANT UNIVERSAL SLIDING AND SEPARATION FILM

Content	Туре	ArtNo	Temperature resistance	Color	\$
400 ml	spray can	79-03	-40°C to +200°C	colorless	12



 Universal sliding and separation film • Works on metallic surfaces, plastic,

wood, leather and rubber

No odor

Protects rubber seals from drying out and cracking

PORTA ADHESION POWER 79-11

ADHESION LUBRICANT

TRANSPARENT LUBRICANT

Content	Туре	ArtNo	Temperature resistance	Pressure resistance	Capillarity	\$
400 ml	spray can	79-11	-30°C to +200°C	haute	élevée	12
	high o • Relia • Wate • High • High	quality synthe	even on moving pa pressure		THE GET OF	

70-06 BELT SPRAY



EXTENDS THE LIFETIME OF BELTS

BONDING AGENT AND CARE PRODUCT

• High capillarity

Content	Туре	ArtNo	Thickness	More power	Prolonged life by	\$
400 ml	spray can	70-06	0.715 g/cm ³	50%	100%	12



· Bonding agent and care product based on

polyolefins • Prevents surface smoothing

Does not contain tar or resins

Achieves performance enhancement of up to 50%

• Extends servicing intervals







INDUSTRIAL QUALITY OF CUTTING FOAM PRODUCTS.

BY FAR THE BEST CUTTING FOAM IN THE INDUSTRY !!!

Universal cutting foam for any metal, from the hardest stainless steel and titanium to soft metals like copper, brass, aluminum and cast metal. Can be universally used for all cutting and working processes.

TYPICAL APPLICATIONS:

Drilling metal: spray directly onto the drill bit or the surface to be drilledSawing metal: spray along the cutting edge Internal pipe thread: cutting spray clings to the work-piece.

- Prevents tarnishing on CrNi-steel and copper
- Perfectly adheres to angled surfaces
- Nitrite-free, Compatible with human skin
- No aggressive additives, No unpleasant odors
- Increases drill bit life and cutting tool times by almost 100%
- Increases the cutting performance of metal saws by up to 40%
- Thickness: 0.860 g/cm³ [0.50 oz./in³]





* Scan the QR code of the product to see the technical data sheet and much more information. You can download the app(free) that can read QR codes on any smart phone.

70-03 / 70-27 TOOL SPRAY



COOLING DRILLING FOAM

RAPIDLY CONDUCTS HEAT AWAY

Content	Туре	ArtNo	Thickness	Washable?	*
400 ml	spray can	70-03	0.860 g/cm ³	yes, degreaser	12
100 ml	spray can	70-0301	0.860 g/cm ³	yes, degreaser	12
50 ml	paste	71-03	N.D.	yes, degreaser	12
400 ml	spray can	70-27	0.860 g/cm ³	yes, water	12



• Prevents tarnishing on CrNi-steel and copper

- Perfectly adheres to angled surfaces
- Nitrite-free, Compatible with human skin
- No aggressive additives, No unpleasant odors
- Increases drill bit life and cutting tool times by almost 100%
- Increases the cutting performance of metal saws by up to 40%



70-01 SYNTHETIC FLUID



CUTTING FLUID

100% SYNTHETIC FLUID FOR METALS SOLUBLE									
Content	Туре	ArtNo	рН	Color	*				
1 l.	liquid	70-0101	8 - 8.5	green - blue	12				
4 .	liquid	70-0104	8 - 8.5	green - blue	4				
20 l.	liquid	70-0120	8 - 8.5	green - blue	1				
205 I.	liquid	70-0145	8 - 8.5	green - blue	1				



- 100% water soluble, Low odor
- Highly resistant to bacterial contamination
- Compatible with most aluminum alloys
- Does not leave spots on machinery
- Not sticky (gummy)



75-03 / 70-02








Туре	ArtNo	рН	Color	Origin	\$
huile	75-0301	5	brown	Germany	12
huile	75-0304	5	brown	Germany	4
huile	75-0320	5	brown	Germany	1
huile	70-0201	5	brown	Canada	12
huile	70-0204	5	brown	Canada	4
huile	70-0220	5	brown	Canada	1
huile	70-0245	5	brown	Canada	1
	huile huile huile huile huile huile	huile 75-0301 huile 75-0304 huile 75-0320 huile 70-0201 huile 70-0204 huile 70-0220	nuile 75-0301 5 huile 75-0304 5 huile 75-0320 5 huile 70-0201 5 huile 70-0204 5 huile 70-0220 5	huile 75-0301 5 brown huile 75-0304 5 brown huile 75-0320 5 brown huile 70-0201 5 brown huile 70-0204 5 brown huile 70-0204 5 brown huile 70-0220 5 brown	huile75-03015brownGermanyhuile75-03045brownGermanyhuile75-03205brownGermanyhuile70-02015brownCanadahuile70-02045brownCanadahuile70-02205brownCanada

- 100% water soluble
 - Highly resistant to bacterial contamination
- Life span of several months
- Very soft for the hands
- Hypo allergenic in most cases





70-11 ADHESIF SPRAY



SEALANTS, FILLERS & ADHESIVE

BONDS QUICKLY

DOND'S Q					
Content	Туре	ArtNo	Density	Temperature resistance	8
400 ml	spray can	70-11	0.705 g/cm ³	-30°C to +80°C	6



- Ideal as a large-area adhesive
 Bonds quickly
- Very good adhesive strength
- Resistant to humidity
- Practical and clean in use
- Bonds securely and firmly to the surface
- Thanks to a special spray-on dispenser valve wide areas bene fit of an accurate multi-sectioned spray application
- Short-term heat resistance up to 100°C

70-30 ABRA+

ANTI-SEIZE AGENT FOR

PROTECTION FOR COATED ABRASIVES


Content	Туре	ArtNo	Thickness	*
400 ml	spray can	70-30	0.715 g/cm ³	12



Prevents seizing of the abrasive surface Extends lifetime of the cutting or grinding

- surface by several times
- Prevents overheating when grinding
 Silicone-free



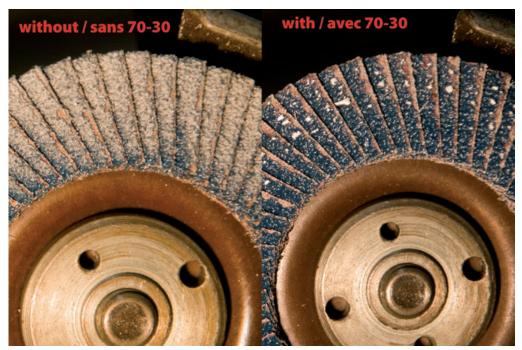





 * Scan the QR code of the product to see the technical data sheet and much more information. You can download the app(free) that can read QR codes on any smart phone.

70-6214 ZINNTEC

Metallux 70-6214	Met
ZINNTEC	State State State
R can also be used as a multi-substitute when repairing ballyees.	
- Resident to many sits and acids comments	And and the local division of the local divi
+ Right fixed resistances are dismostling of parts is recovery	
the of Autom 5 Me Incides and the Street of Automatic	and the other data
	<section-header><section-header><section-header><section-header><section-header><list-item><list-item><list-item><list-item><section-header><section-header><section-header><text></text></section-header></section-header></section-header></list-item></list-item></list-item></list-item></section-header></section-header></section-header></section-header></section-header>



Note: Overdosing on hardener does not accelerate the hardening process, and if the 2-3% ratio is not respected, the quality may be affected.

BODYWORK REPAIR

2-COMPONENT FILLER

Content	Туре	ArtNo	Dry for touching	¥
1370g. + 30g hardener	paste	70-6214	20min	1

Zinntec is a 2-component repair filler for aluminum and steel materials, zinc, GFK, and wood. It can also be used in bodywork repairs as a high-quality replacement for lead solder.







• Resistant to vibration and impact

- Resistant to gasoline, diesel, many oils, and diluted acids
- Non-hygroscopic, shrinks without deformation
- Resistant to weather and corrosion
- No thermal deformation as it can be used cold, no disassembly of parts is necessary
- High heat resistance

- Easy to apply
- Can be sanded easily and without dust after a short drying time
- Has high adhesive and flexural strength
- Can be applied easily on vertical surfaces

70-21 MANUMASTIC



< SEALANTS, FILLERS & ADHESIVE


META-FILL KNEADABLE FILLER

Content	Туре	ArtNo	Temperature resistance	Pressure resistance	Tension resistance	*
100 g.	paste	70-2110	+200°C	7 840 N/cm ²	2 940 N/cm ²	12
400 g.	paste	70-2140	+200°C	7 840 N/cm ²	2 940 N/cm ²	



- Rapid repair epoxy resin
- Simple to apply
- Can also be used under water
- Can be top coated
- Keeps for at least 3 years (in sealed packaging)



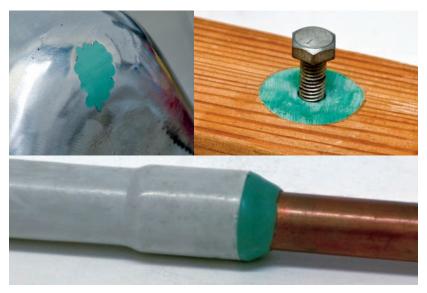



70-04 ANTI-SPATTER

ANTI-SPATTER SPRAY

PREVENTS ADHESION OF WELD SPATTER



Content	Туре	ArtNo	Thickness	Active content	*			
300 ml	spray can	70-04	1g/cm ³	98%	12			
	Free of sil Safe to us Can be w Unthinne Very econ	eparating agent icones and silicone oils e with galvanized pr oducts ashed off with warm water d active ingredient concentra iomical, No flammable by the German Welding	ate					

79-04 PORTA ANTI-SPATTER ANTI-SPATTER SPRAY porta

PREVENTS ADHESION OF WELD SPATTER

Content	Туре	ArtNo	Thickness	*
400 ml	spray can	79-04	0.575 g/cm ³	12



Silicone-free • Washable with warm water • Increases service life of jets and nozzles • Economical to use




75-04 **MULTI-TS**

ANTI-SPATTER FLUID

PREVENTS ADHESION OF WELD SPATTER

Content	Туре	ArtNo	рН	Color	*
4 I.	liquid	75-0404	9.0	blue	4
20 I.	liquid	75-0420	9.0	blue	1
205 l.	liquid	75-0445	9.0	blue	1
Anti-spatter fluid with temporary corrosion protection					

- Can also be used as a cleaning agent and degreaser



NOZZLES HEAT PROTECTION

• Protects the work piece, the welding nozzle and the welding equipment No flammable

NOZZLE PASTE 71-04

AMETA Iti-TS

1008



Content	Туре	ArtNo	Viscosity	Color	
250 g.	paste	71-04	6.0 mm²/s	white	



Nozzle cleaning grease

Based on natural raw materials

 No dangerous thermal decomposition products Economical to use



12

70-70 THERMEX



HEAT PROTECTION PASTE

STOPS WELDING HEAT								
Content	Туре	ArtNo	Thickness	Temperature resistance	\$			
2.5 kg.	paste	70-70	2 g/cm ³	up to 4000 °C	12			
	Cera Out Out	REAL PROPERTY OF THE REAL PROP						

• Can be used again for several times

76-70 GEL PROTECT



78-01 LOCK-IT MEDIUM

HEAT PROTECTION GEL

UNIQUE POLYMER GEL HIGH HEAT RESISTANCE

Content	Туре	ArtNo	Color	Biodegradable	\$				
1 l.	gel	76-70	colorless	yes	12				
in sector									



- Easy to apply • Reduces the danger of fire
- Prevents from heat damage
- Does perfectly adhere to any vertical surface.
- Skin-friendly: no-toxic
- No-corrosive, Biodegradable





THREADLOCKER BLUE

MEDIUM STRENGTH RETAINER

Content	Туре	ArtNo	Dry to touch	Max. strength	¥
10 ml.	liquid	78-0110	10 to 20 minutes	1 to 3 hours	1
50 ml.	liquid	78-0150	10 to 20 minutes	1 to 3 hours	1
250 ml.	liquid	78-0125	10 to 20 minutes	1 to 3 hours	1
• Max load up to 50 Kg [110 lbs.]				k	ADE IN C.S.

- Max. thread 6 mm to 20 mm $[\rlap{l4''}{} to \, {}^{3}\!\!\!4'']$

THREADLOCKER RED

- Temp. resistance -53°C up to +148°C
- [-65°F up to +300°F]

HIGH STRENGTH RETAINER

78-02 LOCK-IT STRONG



Content	Туре	ArtNo	Dry to touch	Max. strength	۲
10 ml.	liquid	78-0210	10 to 20 minutes	1 to 3 hours	1
50 ml.	liquid	78-0250	10 to 20 minutes	1 to 3 hours	1
250 ml.	liquid	78-0225	10 to 20 minutes	1 to 3 hours	1

• Max load up to 125 Kg [275 lbs.]

• Max. thread up to 25 mm [1 in.]

• Temp. resistance -53°C up to +148°C







Thefficients FOOD INDUSTRY PRODUCTS WITHNSF APPROVAL

NSF is an acronym for the National Sanitation Foundation, an independent no self-interest organisation which determines standards and certification for programmes concerning public health, safety and the environment.

Previously all METAFLUX products developed for use in the food industry were certified by the USDA (US Department of Agriculture) classified as H1 or H2 products. This task is now being carried out by the NSF Registration Programme. The criteria for NSF registration are similar to the ones which were used by USDA. NSF registration is internationally recognised and respected.

Metaflux is proud to be in a position to offer NSF products, this being a part of their continued obligation to ensure safety and quality to the food industry. Year after year new items are introduced into our product range, but these too adhere to the same METAFLUX principles: Highest possible technical quality • Lowest possible reduction in air quality within the workplace • Maximum protection of the environment. Strict adherence to these principles guarantees that METAFLUX products will stay in the topmost international group now and in the future.



We recommend NSF approved products not only to the food and drinks industry, animal feed producers and the medical sector, but also to companies who place a high value on human-friendly approved products! The merger of German and Swiss production and sales companies represent an international trade-mark which puts three main principles in the foreground on a worldwide basis. Metaflux products are worth the money! Judge our high standards personally and let yourself be inspired by our Metaflux.



75-77 UNIVERSAL CLEANER



NSF APPROVED CLEANER

MULTI-PURPOSE SOLUBLE DEGREASER

Content	Туре	ArtNo	рН	Color	*
1 l.	liquid	75-7701	11.5	Pink	12
4 I.	liquid	75-7704	11.5	Pink	4
20 I.	liquid	75-7720	11.5	Pink	1



For the cleaning of industrial and mechanical equipment as well as for vehicles, engines, sign-boards, facades, fittings, heating plants, kitchen installations and in general for degreasing metal and stainless-steel surfaces, also for the removal of algae deposits on stone, synthetics and metal. Spray soiled parts, leave for short time to act, wipe off or spray off.

- Not flammable
- Free of solvents requiring declaration (authorisation).
- Biologically degradable in accordance with EC Regulations.
- Not subject to the quick separation directive (for oil separators)
- Dilute with water, 1:40 according to purpose used.
- Contains corrosion inhibitor for short-term

74-50 UNIVERSAL CLEANER SPRAY



MULTI-PURPOSE SOLUBLE DEGREASER NON-FLAMMABLE

NSF APPROVED CLEANER IN SPRAY

Contenu net	Туре	ArtNo	рН	flammable	
400ml.	aérosol	74-50	10	no	12
	Nonfood Compon NSFA1 Registration # 164	and vegetab black, resins stainless stee	ble oils and grease , waxes, nicotine, j	ner and Degreaser is designed to s, cutting oils and emulsions, inl proteins, and other impurities ir ncrete surfaces, wood, stone, cera	ks, paints, carbon adustries of steel,
RODEGRAD	THE THE MERNING	Environ	mentally friendly p	ng spray without GHS hazard syn roducts. Biodegradable products over to train employees to work y	

- oes not require the employer to train employees to work with
- flammable and dangerous substances
- Safe, non-flammable and non-irritating product
- Products made from entirely raw materials
- recyclable of natural origin

71-55 FOODLUB GREASE 200

Metatlux OODLUB GREASE 20 WHERE MUST AND THE ADDRESS OF THE ADDRESS AND ADDRESS OODLUB GREASE 200 TENERAL DECEMBER ODLUB GREASE 20

LUBRICANT GREASE

HIGH QUALITY GREASE FOR FOOD INDUSTRIES

Content	Туре	Color	Temperature resistance	ArtNo	Ŷ
400g	tube	colorless	-20 ° C to 200 ° C	71-55	12
	Nerfood Compounds Program Listed HI Registration # 148240	brewing, c laboratori in all oper ing, cleani suring cor ings, stam • High • Prote	listilleries, wineries, cati es, milking and newsp ations of food process ng, packaging, cannir mponents, friction be pings, ball bearings, tu quality, high tempera	aR AND corrosion in all	notels, bakeries, ries. To be used ng, frying, cook- examples: Mea- rods, ball bear-

- Formulated for increased resistance to water.
- Excellent resistance to corrosion
- NLGI-Class 2 according to ASTM D-217.
- \bullet ASTM D-566 drop point: 318 $^{\circ}$ C.





70-09 / 71-09 BIOLUB



LUBRICANT PASTE AND SPRAY

SPECIAL LUBRICANT FOR FOOD INDUSTRIES

Content	Туре	ArtNo	Color	Temperature resistance	Density	
400 ml	spray can	70-09	colorless	-30°C to 120°C	15,5 mm2/s	12
350g	pot	71-0935	beige	-40°C to 120°C	0,90 g/cm3	12
400g	tube	71-0940	beige	-40°C to 120°C	0,90 g/cm3	12
						_

- Special lubricant for the whole food industry
 - Free of plant and animal fats (will not go rancid)
 - Not soluble in water, capillary effect
 - Tasteless, odourless, colourless
- Not skin irritant



Program Listed H1 Registration # 14186

Nonfood Compounds Program Listed H1 ration # 1

70-74 SUPRALUB

ADHESIVE LUBRICANT/CHAIN SPRAY SPECIAL LUBRICANT WITH ANTICORROSION PROTECTION

Content	Туре	ArtNo	Color	Temperature resistance	Viscosity	*
400 ml	spray can	70-74	colorless	-5°C to 200°C	70 mm²/s	12

- Odour and taste neutral Highly refined/water white
 - Good oxidization and ageing stability
 - Corrosion protection
 - Simultaneously cleans, protects and cares
 - Reduces friction and wear

 - Silicone-free

70-48 **HT-LUB**

HIGH TEMPERATURE LUBRICANT

SPECIAL LUBRICANT WITH ANTICORROSION PROTECTION

Content	Туре	ArtNo	Color	Temperature resistance	¥
400 ml	spray can	70-48	grey	-40°C to 1400°C	12
	 Resistant to hot 	and cold welding effects. / cold water, acids and brin against corrosion and wea idation.		NSF	

70-64 SILICON SPRAY

SLIDE & SEPARATING AGENT


Does not contain metal

SPECIAL LUBRICANT WITH SILICONE

Content	Туре	ArtNo	Color	Temperature resistance	Thickness	\$
400 ml	spray can	70-64	colorless	-45°C to 220°C	0.690 g/cm ³	12
	• Whole • Prod • Acts	e food industry luces new shin antistatically				F









70-31 MULTI-NSF

QR codes on any smart phone.

Scan the QR code of the product to see the technical data sheet and much more information. You can download the app(free) that can read

Metaflux MULTI-NSF - Relop NS

SCREW & RUST LOOSENING

K1 QUICK CLEANER NSF

MULTI-FC	DINCTION S	PRAY				
Content	Туре	ArtNo	Color	Temperature resistance	Density	*
400 ml	spray can	70-31	colorless	-30°C to 120°C	0,69 g/cm3	12
	• Acts • Prev stickii • Prot	luces new shine antistatically ents hardening, fr ng of rubber comp ects electro-conta tral odour	5	Lune with	QUE EN CARD	SF.

75-11 K1 RAPID CLEANER

RAPID CLEANER / DEGREASER



Content Туре Art.-No Color Density 400 ml 75-11 colorless 0,643 g/cm3 12 spray can • Quick cleaner for the groceries industry with NSF Approval · Removes oils, grease and resin deposits quickly and effectively • Safe de-greasing (e.g. for lacquering processes) • Evaporates quickly and leaves no residue oram Listed K1/K2/K tion # 145905 High material density Suitable for quick cleaning of electrocontacts and

75-01 SST CARE NSF

STAINLESS STEEL CLEANER & CARE

Content	Туре	ArtNo	Color	Thickness	
400 ml	spray can	75-01	colorless	0.633 g/cm ³	
		cleaning of stainless steel surfac ains and brings new shine			

< NEUTRAL DEGREASER

Content	Туре	ArtNo	Color	рН	
400 ml	spray can	75-60	colorless	7	



Oil, fats and grease

- Remove label
- Rubber residuals, lubricant
- Ball point, filter tip, pencil mark, ink







75-60 **Citrus Cleaner K1**







CLEANERS & DEGREASERS ENTREMENTATION

A wide selection of Metaflux & Ameta Selection cleaners and degreasers
Specific multi-purpose cleaners and degreasers for professional and industrial applications
Minimum environmental impact against maximum cleaning and degreasing end results
Each product provides the best of modern cleaning and degreasing technology
Liquid products are available in several packaging sizes according to application requirements







LE SUMMUM DES PRODUITS AMÉRICAINS & EUROPÉENS





76-00 AMETA CLEAN



WATER SOLUBLE DEGREASER

DÉGRAISSANT BIODÉGRADABLE MULTI-USAGE

Content	Туре	ArtNo	рН	Flammable	
960 ml [32.46 fl.oz.]	sprayer	76-0001	12.7	no	12
4 l [1.06 gal.]	pot	76-0004	12.7	no	4
20 l [5.28 gal.]	pot	76-0020	12.7	no	1
205 l [54.15 gal.]	barrel	76-0045	12.7	no	1



Cleans and removes grease and oil from equipment, industrial and private surfaces. Recommended for farming vehicles, trucks, construction equipment, ships, etc. Also recommended as cleaner/degreaser for barbecues (rinse well with water).

WATER SOLUBLE DEGREASER

BIODEGRADABLE CLEANER	DOUBLE CONCENTRATION
-----------------------	----------------------

Content	Turno	ArtNo	pН	Flammable	
Content	Туре	AIL-NO	рп	Flammable	
960 ml [32.46 fl.oz.]	sprayer	76-3101	12.7	no	12
4 l [1.06 gal.]	pot	76-3104	12.7	no	4
20 l [5.28 gal.]	pot	76-3120	12.7	no	1
205 l [54.15 gal.]	barrel	76-3145	12.7	no	1



Cleans and removes grease and oil from equipment, industrial and private surfaces. Recommended for farming vehicles, trucks, construction equipment, ships, etc. Also recommended as cleaner/degreaser for barbecues (rinse well with water).

HIGH PRESSURE MACHINE DEGREASER

NO RUBBING CONCENTRATED CLEANER

Content	Туре	ArtNo	рН	Odor	\$
960 ml [32.46 fl.oz.]	sprayer	76-9401	10.5 - 11.5	citrus	12
4 [1.06 gal.]	pot	76-9404	10.5 - 11.5	citrus	4
20 l [5.28 gal.]	pot	76-9420	10.5 - 11.5	citrus	1
205 l [54.15 gal.]	barrel	76-9445	10.5 - 11.5	citrus	1



Produces an active foam that acts in hot or cold water, soft or hard and rinses easily. The action of the solvent removes residues, tar, insect deposits, carbonized deposits from truck exhaust pipes and other rolling vehicles. Ideal for general washing of floors and other surfaces.

WATER-BASED DEGREASER

ECOLOGICAL DEGREASER FOR TUBS WASHING

Content	Туре	ArtNo	Color	Exempted according to	Odor	*
960 ml [32.46 fl.oz.]	sprayer	74-1001	colorless	COV. 2010/75 / UE	apple	12
4 I [1.06 gal.]	pot	74-1004	colorless	COV. 2010/75 / UE	apple	4
20 l [5.28 gal.]	pot	74-1020	colorless	COV. 2010/75 / UE	apple	12



Cleaner with water-based micro-organisms that removes effectively daily dirt, particularly effective for oil particles, grease, abrasion dust, smoke and soot. Very long life span (up to 8 months). For use in workshops, industries and garages.



Double concentration



AMETE

74-10 ECOLOGIC WATER BASED DEGREASER



76-86 ALU-INOX CLEANER



ACID CLEANERS

BIODEGRADABLE ACID DEGREASER

Content	Туре	ArtNo	рН	Flammable	*
960 ml [32.46 fl.oz.]	sprayer	76-8601	2-3	no	12
4 l [1.06 gal.]	pot	76-8604	2-3	no	4
20 l [5.28 gal.]	pot	76-8620	2-3	no	1
205 l [54.15 gal.]	barrel	76-8645	2-3	no	1



Intended for cleaning and polishing aluminum tanks and stainless steel surfaces. Aluminum boats, pontoons, stainless steel props, masts & booms, fishing towers, outriggers.

POWERFUL ACID CLEANERS

POWERFUL SOLUBLE ACID CLEANER

Content	Туре	ArtNo	force	pН	*
500 ml	sprayer	75-2900	strong	2.5	12
101	pot	75-2910	strong	2.5	4
20 l [5.28 gal.]	pot	75-2920	strong	2.5	1
500 ml	sprayer	75-3000	very strong	1	1
101	pot	75-3010	very strong	1	1
20 l [5.28 gal.]	pot	75-3020	very strong	1	1
DESTED OF MERTY	Cleans he	avy stains such as cement and lim	nescale blooms, urine	stone, rust, alg	ae marks,



including on brass and copper. Also acts of heavy stains from grease, oil, albumen, water-marks, and dark patches of mildew. Has a germ-inhibiting, antibacterial action. Not suitable for marble and limestone. Areas of use: Industry, craft trades, food and drink operations.

ACID CLEANERS CONCRETE MIXER TRUCKS

ACID STRIPPER FOR THE CONCRETE INDUSTRY

Content	Туре	ArtNo	рН	Flammable	
960 ml [32.46 fl.oz.]	sprayer	76-9301	1	no	12
4 I [1.06 gal.]	pot	76-9304	1	no	4
20 l [5.28 gal.]	pot	76-9320	1	no	1
205 l [54.15 gal.]	barrel	76-9345	1	no	1



Easily dissolves concrete from concrete mixers and floor flaters. It also removes grease, oil, rust deposits and most dirt from concrete mixers without damaging the paint if used as directed.

ACID CLEANER / STRIPPER

HIGHLY CONCENTRED ACID STRIPPER (WHITENING)

Content	Туре	ArtNo	рН	Flammable	
960 ml [32.46 fl.oz.]	sprayer	76-8701	1	no	12
4 l [1.06 gal.]	pot	76-8704	1	no	4
20 l [5.28 gal.]	pot	76-8720	1	no	1
205 l [54.15 gal.]	barrel	76-8745	1	no	1





Washing product for noble metals such as copper, aluminum, chromium, magnesium, etc. Its double-action formula allows it to be an excellent product for bleaching aluminum. This product is biodegradable, however, we do not recommend cleaning boats or other watercraft close to lakes or rivers to prevent runoff from the product into water.



76-93 **BETON-MAX**



76-87 DEC'ALU









SOLVENT BASED DEGREASER

BITUMEN REMOVAL DEGREASER

Content	Туре	ArtNo		pН	Color				
960 ml [32.46 fl.oz.]	sprayer	76-4601		7	yellow	12			
4 [1.06 gal.]	pot	76-4604		7	yellow	4			
20 [5.28 gal.]	pot	76-4620		7	yellow	1			
205 l [54.15 gal.]	barrel	76-4645		7	yellow	1			
960 ml [32.46 fl.oz.]	sprayer	76-4901	AL	7	orange	12			
4 l [1.06 gal.]	pot	76-4904	MIC	7	orange	4			
20 l [5.28 gal.]	pot	76-4920	ONO	7	orange	1			
205 l [54.15 gal.]	barrel	76-4945	Ш.	7	orange	1			
	5								



SOLVENT BASED DEGREASER

garage and concrete floors.

76-05 TOB CLEAN



HIGHLY CONCENTRATED NEUTRAL UNIVERSAL DEGREASER

Content	Туре	ArtNo	рН	Flammable	
400 ml	spray can	75-17	7	yes	12
400 ml	spray can GEL	75-88	7	yes	4
400 ml	spray can NSF	75-60	7	yes	4
960 ml [32.46 fl.oz.]	vrac	75-2700	7	yes	12



To remove oil, grease, glue, tar, silicone, resin and rubber residues from tools and washable surfaces. Efficient against pen, pencil and fiber markers writings on surfaces and color stains. Adhesive residues on glass surfaces, window frames etc.

and paint drips. Ideal for contractors, municipalities and shops. Works as excellent degreaser for engines,

SOLVENT BASED DEGREASER

TUBS WASHING CLEANER

Content	Туре	ArtNo	Density	Odor	8
960 ml [32.46 fl.oz.]	sprayer	76-0501	0.78 - 0.81	odorless	12
4 l [1.06 gal.]	pot	76-0504	0.78 - 0.81	odorless	4
20 l [5.28 gal.]	pot	76-0520	0.78 - 0.81	odorless	1
205 l [54.15 gal.]	barrel	76-0545	0.78 - 0.81	odorless	1



Solvent-based special degreaser for wash tubs. Also suitable for cleaning pieces, surfaces and parts covered with dry oil or grease.

Practically odorless, Long-lasting, No harmful vapors.

BRAKE CLEANER DEGREASER WITH FAST/INSTANT DRYING

79-15/79-02 BRAKE CLEANER SOLVENT BASED DEGREASER

Content	Туре	ArtNo	Density	Odor	
400 ml	spray can	79-02			
960 ml [32.46 fl.oz.]	sprayer	79-1501	0.78 - 0.81	inodore	12
4 l [1.06 gal.]	pot	79-1504	0.78 - 0.81	inodore	4
20 l [5.28 gal.]	pot	79-1520	0.78 - 0.81	inodore	1
205 l [54.15 gal.]	barrel	79-1545	0.78 - 0.81	inodore	1



Removal of oil and dirt from: brake discs, all brake parts, engines mechanical parts, machines. Quick action and penetration, Not corrosive, Very powerful dissolvent of sticking break dust.



much more information. You can download the app(free) that can read QR codes on any smart phone.

Scan the QR code of the product to see the technical data sheet and

SEALANT & ADHESIVE 70-33



ADHESIVE & SEALANT REMOVER

FOR REMOVAL OF CYANOACRYLATE AND ANAEROBIC GLUES

Content	Туре	ArtNo	Corrosif	working time	
400 ml	spray can	70-33	no	5 to 15 min.	12
	•Worl	cyanoacrylate an ks well as paint re drip gel formula ble and effective		THE REAL PROPERTY OF THE REAL	

70-15 RAPID CLEANER

FAST CLEANING SPRAY

RESIDUE-FREE DEGREASING



Content Туре Art.-No Corrosive Drying 400 ml 70-15 instant 12 spray can no • Quick cleaning, with no harmful vapors No-irritant • Fully residue-free degreasing Specially recommended for cleaning brakes, oil-burners and electronic circuits

70-91 CONTACT SPRAY

ELECTRIC CONTACT CLEANER/PROTECTOR



76-47 AMETA EXTRA

DISSOLVES, DISPLACES, SECURES, LUBRICATES, MAINTAINS

• Does not attack rubber or plastics

Content	Туре	ArtNo	Corrosive	vapor	*
400 ml	spray can	70-91	no	no	12
	• No-i • Fully • Spec oil-b	harmful vapors asing for cleaning brakes, ic circuits or plastics	TO THE GENERAL PROPERTY OF THE SECOND		

ORANGE POWDER DEGREASER

• Penetrates into the oil/grease stain

FOR CONCRETE FLOORS DEEP CLEANING

2-	No. of the Local Division of the Local Divis	Cont
20 kg		20

Content	Туре	ArtNo	Odor	Color	۲
20kg	powder	76-47	N.A.	orange	12
	• For i • Simj • Ecor	rerful orange pov industrial use onl ple to use nomic sant orange odo	у	STE IN COLUMN	



38

75-56 / 70-55 SST CLEANER



🗲 STAINLESS-STEEL CLEAN & CARE

HIGH-PERFORMANCE SPECIAL CARE PRODUCT FOR STAINLESS STEEL

Content	Туре	ArtNo	Color	Density	
400ml.	spray can	70-55	colorless	0,695 g/cm3	12
500ml.	sprayer	75-5600	colorless	0,797 g/cm3	24
960 ml [32.46 fl.oz.]	sprayer	75-5601	colorless	0,797 g/cm3	12
4 l [1.06 gal.]	pot	75-5604	colorless	0,797 g/cm3	4
20 l [5.28 gal.]	pot	75-5620	colorless	0,797 g/cm3	1



Description: High-performance special care product for stainless steel and stoves and smooth plastic surfaces in commercial kitchens, gastro-engineering, kitchen-making, hospitals, foodstuff companies, elevators, benches, chrome-nickel processing companies, catering, etc.

75-44 CLEAN-NOX



< STAINLESS STEEL GEL CLEANER

POWERFUL DETERGENT GEL FOR STAINLESS STEEL

Content	Туре	ArtNo	рН	Flammable	
960 ml [32.46 fl.oz.	.] sprayer	75-4401	1.5	no	12
4 l [1.06 gal.]	pot	75-4404	1.5	no	4
20 l [5.28 gal.]	pot	75-4420	1.5	no	1
205 l [54.15 gal.]	barrel	75-4445	1.5	no	1



Highly effective cleaning gel for all stainless steel, aluminum and no-ferrous metal surfaces. Removes deposits such as limescale and cement bloom, extraneous rust, paint runs, welding scale and light grease and oil marks.

75-26 RUST KILLER

t-Kille



FOR SLIGHTLY RUSTED PIECES						
Content	Туре	ArtNo	Soluble	Flammable	۲	
960 ml [32.46 fl.oz.]	sprayer	75-2601	yes	no	12	
4 l [1.06 gal.]	pot	75-2604	yes	no	4	
20 l [5.28 gal.]	pot	75-2620	yes	no	1	
205 l [54.15 gal.]	barrel	75-2645	yes	no	1	



Special cleaning agent with rust removing capacity for parts and surfaces that are lightly or moderately affected by initial surface corrosion. Maintenance and repair shops. Removes rust and corrosion on detached parts, tools, and metal surface. Recommended for re-conditioning of old parts and general maintenance.

70-66 **STAINLESS STEEL PICKLING & POLISHING PASTE**



PICKLING PASTE

FOR DOMESTIC USE

Content

960 ml [32.46 fl.oz.]

4 [1.06 gal.]

20 I [5.28 gal.]

205 I [54.15 gal.]

FOR CHROME-NICKEL-STEEL STRIPPING

Content	Туре	ArtNo	Corrosive	working time	*
330g.	paste	70-6633	yes	less than 5 min.	12
	For For	nless steel pickling p chrome-nickel-steel preventive removal o		Real Provide Action	

Art.-No

77-0301

77-0304

77-0320

77-0345

Paint runs, Patches of rust, Residues of adhesive

BIO-ZONE 77-03

ODMESTIC ALL PURPOSE CLEANER



76-03 BIO-ZONE+



ODORS NEUTRALIZER

75-83

FOOD INDUSTRY CLEANER

Туре

sprayer

pot

pot

barrel

Content Type Art.-No pH Flammable 960 ml [32.46 fl.oz.] 76-0301 12 sprayer 8-9 no 4 [1.06 gal.] 76-0304 8-9 pot no 4 20 | [5.28 gal.] 76-0320 8-9 1 pot no 205 I [54.15 gal.] 76-0345 barrel 8-9 no 1



FOR INDUSTRIAL USE

Cleaner degreaser, deodorizer, 100% biological based enzymes. It does not contain any Solvents and does not emit harmful and flammable vapors, its pH is neutral and is completely biodegradable according to OECD 301E. Thus, Bio-Zone + offers a safe alternative to chemical solvents, thus eliminating health risks and the requirement to dispose of waste that is toxic to the environment.

ODORS FRESHNER / NEUTRALIZER

CREATES A FRESH AND FRUITY SCENT

Content	Туре	ArtNo	Odor	*
400 ml	spray can	75-83	fruity	12



• Eliminates unpleasant odors Fresh and fruity scent

Long-lasting, long-lasting product





• Effective even for large spaces thanks to the TURBO JET



12

4

1

1

Flammable

no

no

no

no

pН

8-9

8-9

8-9

8-9

Its cleansing action removes organic dirt and odors in an irreversible way. Its efficacy has been validated according to general Canadian standards (CGSB (F) 2-GP-11M). Bio-Zone contains no solvents and does not release harmful and flammable vapors, its pH is neutral and is completely biodegradable According to OECD 301 E. It is approved by Health Canada for safe use. 74-94 V-SECURE

CLEANER WITH HYGIENIC ACTION

ANTIBACTERICIDE DETERGENT								
Content	Туре	ArtNo	рН	Dilution	\$			
960 ml [32.46 fl.oz.]	spray	74-9401	10	yes 10:1	12			
4 I [1.06 gal.]	bottle	74-9404	10	yes 10:1	4			
20 l [5.28 gal.]	bottle	74-9420	10	yes 10:1	1			
205 l [54.15 gal.]	tob	74-9445	10	yes 10:1	1			



Reliably clean steel, tiles, wood, plastic and all other washable surfaces. Eliminates micro-organisms from contaminated surfaces. Thanks to its degreasing properties, it acts on the lipid membrane of viruses and dissolves it, making surfaces hygienically clean. VOC FREE, non-flammable & non-abrasive.



74-95 V-SECURE GLASS



CLEANER WITH HYGIENIC ACTION

ANTIBACTERICIDE DETERGENT FOR GLASS

Content	Туре	ArtNo	рН	Dilution	*
960 ml [32.46 fl.oz.]	spray	74-9501	11.4	no	12
4 l [1.06 gal.]	bottle	74-9504	11.4	no	4
20 l [5.28 gal.]	bottle	74-9520	11.4	no	1
205 l [54.15 gal.]	tob	74-9545	11.4	no	1



Reliably cleans all glass surfaces, polycarbonate, acrylic, plastic, and all other washable surfaces. Eliminates micro-organisms from contaminated surfaces. Thanks to its degreasing properties, it acts on the lipid membrane of viruses and dissolves it, making surfaces hygienically clean. Ready to use: quick-drying and does not leave a mark.



CAR CLEANING & CARE

A selection of highly professional products for car cleaning & care...

CLEANING WIPES

CAR BODY

TIRES

WHEEL RIMS

INTERIORS

FIBERGLASS & ACRYLIC

GLASS & MIRRORS

ENGINE

LUBRICATION







VEHICLE BODY CLEANER

HIGH QUALITY SOAP WITH ADDED WAX

Content	Туре	ArtNo	рН	Flammable	•
960 ml [32.46 fl.oz.]	sprayer	76-9501	6.5-7.5	no	12
4 l [1.06 gal.]	pot	76-9504	6.5-7.5	no	4
20 l [5.28 gal.]	pot	76-9520	6.5-7.5	no	1
205 l [54.15 gal.]	barrel	76-9545	6.5-7.5	no	1



Shampoo foam generates an intense and persisting foam that removes dirt from the vehicle body and other washable surfaces. Its formula ensures perfect removal of dust, dirt and deposited particles. The added high quality wax leaves a protection film with a shiny finish.

SUG STAIN CLEANER

QUICK & EASY BIODEGRADABLE CLEANING

Content	Туре	ArtNo	рН	Flammable	
960 ml [32.46 fl.oz.]	sprayer	76-1901	11.5	no	12
4 [1.06 gal.]	pot	76-1904	11.5	no	4
20 l [5.28 gal.]	pot	76-1920	11.5	no	1
205 l [54.15 gal.]	barrel	76-1945	11.5	no	1



Removes insects and bugs from car, motor bike and truck bodies. Also removes dirt, grease and oil spots that generally resist to generic cleaners. Leaves a perfectly clean surface. Apply to the surface and leave to act for few seconds. Remove the product with a sponge or a clean cloth wipe.

76-24 / 76-28 ENGINE CLEAN



AMETR

ENGINE CLEANERS

DEGREASER FOR ALL KIND OF ENGINE

			and the second se		
Content	Туре	ArtNo	Power	рН	
960 ml [32.46 fl.oz.]	sprayer	76-2401	strong	12.7	12
4 l [1.06 gal.]	pot	76-2404	strong	12.7	4
20 l [5.28 gal.]	pot	76-2420	strong	12.7	1
960 ml [32.46 fl.oz.]	sprayer	76-2801	very strong	12.7	12
4 l [1.06 gal.]	pot	76-2804	very strong	12.7	4
20 l [5.28 gal.]	pot	76-2820	very strong	12.7	1



Special industrial power cleaner and degreaser for engines. Highly penetrant for a thorough removal of dirt deposits from any engine surfaces. The product is based on an approved formulation technology containing powerful cleaning and degreasing agents that rapidly dissolve dirt, grease, asphalt, fresh varnish and materials.

76-14/76-86 ULTRA-MAG KARA WHEEL RIM CLEANER

HIGHLY CONCENTRATED DEGREASER

Content	Туре	ArtNo	Power	pН	*
960 ml [32.46 fl.oz.]	sprayer	76-1401	alkaline	12.7	12
4 l [1.06 gal.]	pot	76-1404	alkaline	12.7	4
20 l [5.28 gal.]	pot	76-1420	alkaline	12.7	1
960 ml [32.46 fl.oz.]	sprayer	76-1501	acid	3	12
4 l [1.06 gal.]	pot	76-1504	acid	3	4
20 l [5.28 gal.]	pot	76-1520	acid	3	1



Cleaner to bring back shine on aluminum and dull stainless steel parts. Efficient remover of diesel combustion residues, oxidation and grease. No contents of solvents based on aromatic, aliphatic or chlorinated hydrocarbons.Frottez par un chiffon et rincez to l'eau. Normalement une petite quantité suffit. Répétez l'opération en case de saleté résistante.



76-25 TAPIS'NET



CARPET CLEANER

QUICK & EASY BIODEGRADABLE CLEANING

Content	Туре	ArtNo	pН	Flammable	
960 ml [32.46 fl.oz.]	sprayer	76-2501	11.5	no	12
4 [1.06 gal.]	pot	76-2504	11.5	no	4
20 l [5.28 gal.]	pot	76-2520	11.5	no	1
205 l [54.15 gal.]	barrel	76-2545	11.5	no	1
	<u> </u>				



Cleaner with industrial strength to remove stains on carpets and fabrics. • Biodegradable

No flammable
No-corrosive

No-abrasive

Phosphate-free

76-17 BOAT-IN



BOAT INTERIORS CLEANER

GENERAL PURPOSE CLEANER FOR AQUATICS VEHICLES

Content	Туре	ArtNo	рН	Flammable	*
960 ml [32.46 fl.oz.]	sprayer	76-1701	11.5	no	12
4 I [1.06 gal.]	pot	76-1704	11.5	no	4
20 l [5.28 gal.]	pot	76-1720	11.5	no	1
205 l [54.15 gal.]	barrel	76-1745	11.5	no	1



Special general purpose cleaner specifically developed for cleaning and care of boat interiors. The product is based on an approved formulation technology containing powerful cleaning and degreasing agents that rapidly dissolve dirt, grease, dust, pencil marks, shoe marks and all the types of dirt that generally offer resistance to common cleaners. After application surfaces appear clean with no oil/grease smears.

76-18 / 76-16 BOAT-OUT



BOAT HULL CLEANER

POWERFUL CLEANER FOR AQUATICS VEHICLES

Content	Туре	ArtNo	рН	Puissance	
960 ml [32.46 fl.oz.]	sprayer	76-1801	11.5	alcalin	12
4 l [1.06 gal.]	pot	76-1804	11.5	alcalin	4
20 l [5.28 gal.]	pot	76-1820	11.5	alcalin	1
205 l [54.15 gal.]	barrel	76-1845	11.5	alcalin	1
960 ml [32.46 fl.oz.]	sprayer	76-1601	2-3	acide	12
4 l [1.06 gal.]	pot	76-1604	2-3	acide	4
20 l [5.28 gal.]	pot	76-1620	2-3	acide	1
205 l [54.15 gal.]	barrel	76-1645	2-3	acide	1
4 [1.06 gal.] 20 [5.28 gal.]	pot pot	76-1604 76-1620	2-3 2-3	acide	



Special general purpose cleaner specifically developed for cleaning and care of boat hulls. The product is based on an approved formulation technology containing powerful cleaning and degreasing agents that rapidly dissolve dirt, grease, algae, salt stains, and all the types of dirt that generally offer resistance to common cleaners.



76-20 **GREEN POLISH**



PROFESSIONAL POLISHING LIQUID/PASTE (MEDIUM GRAIN)

Content	Туре	ArtNo	рН	Grain	8
250 ml	pot	76-2025	N.A	medium	24
960 ml [32.46 fl.oz.]	pot	76-2001	N.A.	medium	12
4 l [1.06 gal.]	pot	76-2004	N.A.	medium	4



igh performance liquid polish paste specifically made for professional cleaning and polishing of aluminum, magnesium and stainless steel surfaces. Intended for professional cleaning and polishing of aluminum, magnesium and stainless steel . Excellent for alloy wheel rims. Shake well before use. Pour a small quantity of product on a buffer and rub it on the selected area in circular clockwise direction. . A clean cotton cloth will help to remove excessive polish from the surface.



WHITE POLISH 76-21

POLISHING ALU/CHROME/SST **PROFESSIONAL POLISHING LIQUID/PASTE (FINE GRAIN)**

Content	Туре	ArtNo	рН	Grain	\$
250 ml	pot	76-2125	N.A.	fine	24
960 ml [32.46 fl.oz.]	pot	76-2101	N.A.	fine	12
4 l [1.06 gal.]	pot	76-2104	N.A.	fine	4



high performance liquid polish paste specifically made for professional cleaning and polishing of aluminum, magnesium and stainless steel surfaces. Intended for professional cleaning and polishing of aluminum, magnesium and stainless steel . Excellent for alloy wheel rims. Shake well before use. Pour a small quantity of product on a buffer and rub it on the selected area in circular clockwise direction. A clean cotton cloth will help to remove excessive polish from the surface.



76-90 REVOLUTION

VEHICLE BODY PROTECTION

FORMULA BASED ON MAGNETIC POLYMERS

Content	Туре	ArtNo	Flammable	Biodegradable	
960 ml [32.46 fl.oz.]	sprayer	76-9001	no	yes	12
4 l [1.06 gal.]	pot	76-9004	no	yes	4
20 l [5.28 gal.]	pot	76-9020	no	yes	1
205 l [54.15 gal.]	barrel	76-9045	no	yes	1



Revolution shampoo provides a unique formula based on magnetic polymers that replace wax and its additional applications after washing. One application every month guarantees a brand new shine of the vehicle body.

VEHICLE BODY PROTECTION

HIGH QUALITY CREAM / WAX FOR VEHICLES

Content	Туре	ArtNo	Cire	Biodegradable	
960 ml [32.46 fl.oz.]	sprayer	76-9801	liquid	yes	12
4 [1.06 gal.]	pot	76-9804	liquid	yes	4
20 l [5.28 gal.]	pot	76-9820	liquid	yes	1
205 l [54.15 gal.]	barrel	76-9845	liquid	yes	1
960 ml [32.46 fl.oz.]	sprayer	76-9701	paste	yes	12
4 l [1.06 gal.]	pot	76-9704	paste	yes	4
20 l [5.28 gal.]	pot	76-9720	paste	yes	1



Product allowing you to shine/protect your car in just 10 minutes. In addition to providing a high gloss finish with its carnauba formula, our wax contains hydrophobic polymers and takes advantage of nanotechnologies to provide long-lasting protection against weather and road contaminants.



76-98 / 76-97 **CAR WAX AND PASTE**



76-99 BLACK-IT

QR codes on any smart phone

* Scan the QR code of the product to see the technical data sheet and much more information. You can download the app(free) that can read



TIRE GLOSS LIQUID

LONG LASTING BLACK-IT TIRE DRESSING

Content	Туре	ArtNo	finition	Flammable	*
960 ml [32.46 fl.oz.]	sprayer	76-9901	shining	yes	12
4 [1.06 gal.]	pot	76-9904	shining	yes	4
20 l [5.28 gal.]	pot	76-9920	shining	yes	1
205 l [54.15 gal.]	barrel	76-9945	shining	yes	1

Art.-No

75-18

76-2301

76-2304

76-2320

76-2345



Content

400 ml

960 ml [32.46 fl.oz.]

4 I [1.06 gal.]

20 | [5.28 gal.]

205 I [54.15 gal.]

Black-it tire dressing is a premium dressing that produces a deep black, glossy appearance on new and nearly new tires, as well as a deep black, natural appearance on older tires with a long-lasting durability.

pН

11.5

11.5

11.5

11.5

11.5

12

12

4

1

1

Flammable

yes

no

no

no

no

76-23 VITRE PLUS

70-13 COCKPIT SPRAY

Phosphate Free: Does Not Release Steam Alcohol-free and ammonia-free

· No flammable, No-corrosive and No-abrasive

With natural fragrance

GLASS & MIRRORS CLEANER

Type

spray can

sprayer

pot

pot

barrel

NO RESIDUES, DEEP CLEANING

NETTOYANT SURFACE PLASTIQUE



ENTRETIEN SURFACE PLASTIQUE ET CAOUTCHOUC

Content	Туре	ArtNo	Smearing	
400 ml	spray can	70-13	no	12
	No-smear Cleaned s	dust and dirt with no efstrong ing urfaces appear like brand new dust attraction v scented	TOUR DE COMP	

77-04 BIO-ZONE LEATHER 76-1301 LEATHER CONDITIONER



LEATHER TREATMENT & CLEANING

CLEANER AND CONDITIONER FOR LEATHER

Content	Туре	ArtNo	рН	Action	
960 ml [32.46 fl.oz.]	sprayer	77-0401	8-9	cleaner	12
4 l [1.06 gal.]	pot	77-0404	8-9	cleaner	4
20 l [5.28 gal.]	pot	77-0420	8-9	cleaner	1
960 ml [32.46 fl.oz.]	pot	76-1301	N.A.	conditioner	12
					-



Intended for professional protection of leather upholstery in cars, trucks, vans, motorhomes, boats, homes, offices, etc. **76-1301:** Special liquid intended for professional protection of leather upholstery. It contains an oil base for an excellent spreading on any leather surfaces and long-lasting protection. **77-04:** Thanks to its ideal composition of 100% biological surfactants and enzymes, it safely removes grease stains and organic soils from all leathers. Indeed, it acts at depth and on the surface without altering or modifying the **46**

NATURAL solvent free hand cleaners

Macrocream and Sendy wipes are 100% natural and solvent-free industrial hand cleaners. Made for professionals looking for advanced products that fully respect the human skin, as well as the environment, while providing the best cleaning action ever.

Macrocream and Sendy wipes maintain the skin pH value and are therefore the products recommended to people with skin problems who need to wash their hands several times a day. North American professionals now have access to unique hand cleaners made in Italy by Nettuno, leader in solvent-free hand detergents.

Metaflux hand cleaning and protection products represent the pinnacle of the "made in Germany" quality product range. Dermatologically tested, these products are free of toxic agents and provide features exceeding typical standards.



Art.-No

01047

00175

00790

00324

00967

00785

00310

00451

00297

ABRASIVE SOAP FOR HANDS

MACROCREAM NATURAL HANDS CLEANER

Contenu net

250ml.

1 | [32.46 fl.oz.]

3 | [0.79 gal.]

5 | [1.32 gal.]

12 x 250ml.

Wall Display

Wall Display T-DUCK

Wall Display T-WALL

Spare pump

Вох

1

2

3

4



00175



Display for 01047 12 x 01047



T-DUCK for T-BAG 00790 item number: 00310




T-WALL for T-BOX 00324 item number: plastic= 00451 Stainless Steel: 00327



SPARE PUMP/SPRAY For T-BOX 5000ml. 00324 item number: 00297

For T-BOX small 1000ml. 00175 item number: 00555







00790

HAND CLEANSING CREAM WITH NATURAL MICROSPHERES

3 000 ml [0.79 gal.] Macrocream T-Bag Refill Bag size:H. 340 mm x W. 260 mm The T-Bag refill is intended as a one-size refill for both the T-Box pump and T-Big wall dispenser.

Macrocream is a 100% natural and solvent-free creamy hand cleanser with unique detergent and softening properties. The washing base is a combination of solvent-free and skin-friendly ingredients providing a highly effective detergent action against any kind of dirt.

Macrocream also contains fine microspheres of vegetable origin that strengthen its cleansing action. Thanks to the same pH value as the human skin, it can be used as often as needed without causing any reddening of the skin. 3000 ml Macrocream with glycerin is enough for 1000 hand washing operations to remove both greasy and dry dirt.

RANGE OF APPLICATIONS

Grease, oil, hydrocarbons, bitumen, paint, enamel, silicone, adhesive, resin and graphite.



18

12

6

4

12

1

1

1

1

Q

1

Type

tube

pump

refill bag

pump


Display for 01047

distributor for T-BAG

support for T-BAG

support for T-BOX

Spare pump for T-BOX









SENDYGIEN





NOT IRRITATING: GENTLE TO THE SKIN

Content	Туре	ArtNo	
1000ml.	spray	00507	12
5000ml.	bottle	00579	4

Sanitizing liquid soap characterized by the presence of OPP. Sendygien is ideal for professionals operating in environments subjected to hygiene inspections and quality audits of the HACCP procedures, for example: the food and restaurant industry. It is an essential product, free of any contaminants such as coloring or fragrance, meaning it is particularly delicate on the skin.

· Savon sans ingrédients contaminants: sans couleur ni parfum ni solvant.

• N'est pas irritant: doux pour la peau.

Biodégradable.

• Format portable et pratique: 1 000 ml. = 500 lavages de main...



HAND SANITIZER



NPN FDA APPROVED SANITIZER

ETHYL ALCOHOL 80% - KILL 99.9% OF GERMS

Content	Туре	ArtNo	
12ml.	pencil pocket spray	09726	1
59ml.	spray bottle	09853	1

Liquid spray to quickly clean and disinfect hands. Hygienizes hands without the need for water.

- Kills 99.99% of germs.
- Contains 80% Ethyl Alcohol
- Portable and practical format

COMPLIES WITH NPN 80101730 HEALTH CANADA AND FDA

Rapid evaporation, fragrance-free and does not dry the skin.





ALCOHOL FREE HAND SANITIZER



Content	Туре	ArtNo	¥
100ml.	spray	00645	24
300ml.	spray	00600	12
800ml.	bag	10500	6
Display for bag	wall display	92500	1

Spray lotion for quick hand hygiene. No need of using water. Does not contain alcohol. To be used in any situation where total hygiene is required.

- Safe for the skin, does not irritate
- Biodegradable.
- Alcohol-free; Not flammable
- No need for water.Dermatologically tested









KILL PLUS

SENDY WIPES

00813

HAND CLEANING WIPES (ANTIBACTERIAL)

SOLVENT FREE WIPES

EMOLIENTS ABRASIVE SOAP

Content	Туре	ArtNo	۲
40 wipes 15x20 cm.	wet wipes	00087	6
100 wipes 26x27 cm.	wet wipes	00813	4



Sendy wipes are lightly abrasive wet wipes in no-woven fabric, large and resistant, for HEAVY DUTY DIRT. They are intended for people working in environments where water and soap are not within reach, or for those workers who cannot leave their workplace during the day even when dealing with resistant and sticky dirt. They contain lanolin to protect and nourish the skin and are enriched by an effective anti-bacterial additive - tested by an external laboratory according to BSEN 1276:1997 and BSN 12054:1995 standards to guarantee their resistance to salmonella, listeria, E. Coli and Weil's disease.

76-48 **CLEAN-IT**

Content	Туре	ArtNo	
4 l [1.06 gal.]	pot	76-4804	12
20 l [5.28 gal.]	pot	76-4820	4

Type

gel

mousse

spray

Hand cleaning in public areas. Delivered as soap, spray or foam, Sendy by Nettuno is a modern and mild hand soap with softening properties intended for public areas, such as: offices, schools, restaurants, airports, etc.



TS-800 SENDY POUCH

Content

800 ml [27.05 fl.oz.]

800 ml [27.05 fl.oz.]

800 ml [27.05 fl.oz.]

Abrasive soap with solvent. Very economic and effective.

- Biodegradable hand cleaner for use with or
- without water

ABRASIVE SOAP WITH SOLVENT

- Contains emollients and mild abrasive
- harmless for hand skin Cherry scented

GENERAL PURPOSE SOAP



TS-800



The formulation provides an effective removal of light dirt from hand skin. It preserves the hydrolipidic film balance of skin, leaving hands delicately scented.



Art.-No

10100

10200

10300

6

6

6

WALL DISPENSER FOR TS-800

T-SMALL FOR SENDY POUCH SOAP

Content	Туре	ArtNo	
T-Small wall dispenser WHITE	gel	90100	1
T-Small wall dispenser WHITE	spray	90400	1
T-Small wall dispenser WHITE	foam	90600	1



Elegant wall dispenser available in two colors for hand cleaning in public areas. The T-Small wall dispenser is available with three pumping systems to dispense either soap in spray, foam or liquid state (one pumping /dispensing system on board only). Once empty, the dispenser simply needs to be shell-opened with the included plastic key to be refilled with the available 800 ml [27.05 fl.oz.] Sendy pouch, which must match with the pumping / dispensing system on board (i.e. spray dispenser with Sendy Spray). Sendy pouches are not interchangeable! The T-Small dispenser includes a scented tablet. Mixed scented tablets available.







T-LINE



NETTUNO DISPLAY T-LINE

EXPO T-LINE FOR NETTUNO PRODUCTS

FOR CONDITIONING OF HAND SKIN

Units content	Туре	Display content	
5 l [1.32 gal.]	pump	4 x 00324	4
3 l [0.79 gal.]	bag	9 x 00790	6
20 l [5.28 gal.]	wipes bucket	6 x 00813	1



Macrocream is a 100% natural and solvent-free creamy hand cleanser with unique detergent and softening properties. The washing base is a combination of solvent-free and skin-friendly ingredients providing a highly effective detergent action against any kind of dirt. Macrocream also contains fine microspheres of vegetable origin that strengthen its cleansing action. Thanks to the same pH value as the human skin, it can be used as often as needed without causing any reddening of the skin.

75-82 HYDRATING CREAM



HANDS CARE & PROTECTION

Content	Туре	ArtNo	Odor	*
100 ml [3.38 fl.oz.]	cream	75-82	natural	12
	ended for the protection an n. ermatologically safe hand p	d conditioning of hand protection cream	Ste IN GERALIN	



Dermatologically safe hand protection creaters Based on bees-wax and allantoin

Leaves a pleasant feeling on the skin



70-28 HAND PROTECTION

FOAM

HANDS CARE & PROTECTION

PROTECTS HANDS AGAINST HEAVY DIRT

Content	Туре	ArtNo	Density	Odor	*
400 ml	spray can	70-28	0,945 g/cm ³	natural	12
Dermatologically tested					



Water-resistant and soap-resistant
Prevents skin irritations: No-toxic
Allows the skin to breathe and transpire normally
Prevents skin from drying out
Very good coverage




ACCESSORIES



VAPORISATOR / PUMP / SPOUT

ACCESSORIES FOR CLEANER

Content	Туре	ArtNo	*
1.5 l [50.72 fl.oz.]	alkaline products	75-3099	1
1.5 [50.72 fl.oz.]	acid products	75-3199	1
1.5 l [50.72 fl.oz.]	solvent based products	75-2799	1
960 ml [32.46 fl.oz.]	general purpose	R23-400	12
N.A.	spout for20l.	74-1010	24



CHEMICAL

Table of content...

ltem #	Description	Page
00087	Sendy Wipes in Dispenser Bucket (40pcs)	51
00175	Macrocream Disp. Bottle 1000 ml	49
00297	T-Box Spare Pump	49
00310	T-Duck dipenser for T-Bag	49
00324	T-Box Macrocream Pump D. 5000 ml	49
00327	T-Box Wall Bracket	49
00555	Spare Pump for Dispenser Bottle 00175	49
00785	T-Big Macrocream Wall Dispenser	49
00790	Macrocream T-Bag Refill 3000 ml [0.79 gal.]	49
00813	Sendy Wipes in Dispenser Bucket (100 pcs)	51
00815	Expo T-Line Display with Nettuno Products	52
00836	Counter Top Display 24 Sendy Wipes	51
00844	Single Sendy Wipe	51
00933	Pump for Macrocream 20 [5.28 gal.] 00952	49
00952	Macrocream 20 [5.28 gal.] with Pump	49
10100	Sendy Soap 800 ml [27.05 fl.oz.]	51
10200	Sendy Foam 800 ml [27.05 fl.oz.]	51
10200	Sendy Spray 800 ml [27.05 fl.oz.]	51
10100	Sendy Soap 800 ml [27.05 fl.oz.]	51
10200	Sendy Foam 800 ml [27.05 fl.oz.]	51
10200	Sendy Spray 800 ml [27.05 fl.oz.]	51
90100	T-Small White (Sendy Soap)	51
90300	T-Small Black (Sendy Soap)	51
90300	T-Small White (Sendy Spray)	51
90400		51
90600	T-Small Black (Sendy Spray) T-Small White (Sendy Foam)	51
		51
90700	T-Small Black (Sendy Foam)	
70-0104 70-0120	Synthetic Fluid for Metals 41 [1.06 gal.]	25
	Synthetic Fluid for Metals 201 [5.28 gal.]	25
70-0145	Synthetic Fluid for Metals 205 [54.15 gal.]	25
70-0204	Metal Cutting Fluid 4 I [1.06 gal.]	25
70-0220	Metal Cutting Fluid 20 I [5.28 gal.]	25
70-0245	Metal Cutting Fluid 205 l [54.15 gal.]	25
70-03	Tool Spray 400 ml [13.52 fl.oz.]	25
70-0301	Tool Spray 100 ml [3.38 fl.oz.]	25
70-04	Anti-Spatter Spray 300 ml [10.14 fl.oz.]	27
70-05	Torsion Spray 400 ml [13.52 fl.oz.]	13
70-06	Belt Spray 400 ml [13.52 fl.oz.]	20
70-07	Wheelset & Chain Spray 400 ml [13.52 fl.oz.]	19
70-08	Super Degrip Spray 400 ml [13.52 fl.oz.]	13
70-09	Biolub Spray 400 ml [13.52 fl.oz.]	31
70-11	Adhesive Spray 400 ml [13.52 fl.oz.]	26
70-13	Plastic Care (Cockpit) Spray 400 ml	46
70-14	Leak Seek Spray 300 ml [10.14 fl.oz.]	14
70-15	Fast Cleaning Spray 400 ml [13.52 fl.oz.]	38
70-16	Liquid Aluminum Spray 400 ml [13.52 fl.oz.]	5
70-17	CC 80 Multifunction Spray 400 ml	11
70-1750	CC 80 Multifunction Spray 500 ml	11
70-18	Chromal Spray 400 ml [13.52 fl.oz.]	6
70-19	Protect Spray 400 ml [13.52 fl.oz.]	13
70-19		
70-19	Meta-Fill Kneadable Filler 100 g [3.53 oz.]	26

Item #	Description	Page
70-25	Metaflon Spray 400 ml [13.52 fl.oz.]	19
70-2501	Metaflon Spray 100 ml	19
70-27	Tool Spray 400 ml [13.52 fl.oz.]	25
70-28	Hand Protection Foam 400 ml [13.52 fl.oz.]	52
70-30	Anti-Seize Spray (Abras.) 400 ml	26
70-31	Multi-NSF Spray 400 ml [13.52 fl.oz.]	32
70-33	Adhesive Remover Spray 400 ml	38
70-35	Rost-I-Sol "TOP" 10 Kg [22 lbs.]	9
70-3600	Rost-I-Sol 500 g.	9
70-3605	Rost-I-Sol 5 I	9
70-3610	Rost-I-Sol 10 I [2.64 gal.]	9
70-37	Rust Safe Spray (Rust-Brown) 400 ml	9
70-38	Galva-Protect 1 Kg [2,20 lbs.]	3
70-39	Corrosion Protector Wax 400 ml	10
70-4001	Zinc Paste 1 Kg [2.20 lbs.]	2
70-4002	Zinc Paste 1 Kg [2.20 lbs.] with brush	2
70-4050	Zinc Paste 500 g.	2
70-4010	Zinc Paste 10 Kg [22 lbs.]	2
70-4101	Alu-Zinc Paint-Ready Paste 1 [33.80 fl.oz.]	4
70-4110	Alu-Zinc Paint-Ready Paste 10 [2.64 gal.]	4
70-42	Alu-Zinc Spray 400 ml [13.52 fl.oz.]	4
70-43	Zinc Sheen Spray 400 ml [13.52 fl.oz.]	4
70-44	Rust Safe Spray (Gray) 400 ml [13.52 fl.oz.]	9
70-45	Zinc Spray 400 ml [13.52 fl.oz.]	2 - 3
70-46	Zinc Base Spray 400 ml [13.52 fl.oz.]	3
70-47	Multi Spray 400 ml [13.52 fl.oz.]	12
70-4750	Multi Spray 500 ml	12
70-48 70-49	HT-LUB nsf 400 ml [13.52 fl.oz.] Weld-Copper Spray 400 ml [13.52 fl.oz.]	31
70-49	Aluminum Spray (abr-res) 400 ml	6 5
70-52	Stainless Steel Care Spray 400 ml	39
70-56	Stainless Steel Spray 400 ml [13.52 fl.oz.]	5
70-57	Copper Spray 400 ml [13.52 fl.oz.]	6
70-58	Brass Spray 400 ml [13.52 fl.oz.]	6
70-6300	TS 400 Rust Protection (Gray) 1 Kg [2.20 lbs.]	9
70-6301	Thinner 1 [33.80 fl.oz.]	2-9
70-6305	TS 400 Rust Protection (Gray) 5 Kg [11 lbs.]	9
70-64	Silicone Spray NSF Licensed 400 ml	31
70-6633	Stainless St. Pickling/Pol. Paste 330 g	40
70-70	Thermex Paste 2.5 Kg [5.51 lbs.]	28
70-74	Supralub Spray 400 ml [13.52 fl.oz.]	31
70-76	Clear Grease Spray 400 ml [13.52 fl.oz.]	18
70-78	Stainless Steel Finish Spray 400 ml	5
70-81	Metal Spray Lubricant 400 ml [13.52 fl.oz.]	17
70-8199	Brush Adaptor for Metaflux 70-81 Spray Can	17
70-82	Anti-Seize Moly Spray 400 ml [13.52 fl.oz.]	18
70-83	Dry-Lube Spray 400 ml [13.52 fl.oz.]	18
70-8501	Metal Paste Lubricant 100ml. gun	17
70-8508	Metal Paste Lubricant 4 g [0.14 oz.] Pouch	17
70-8510	Metal Paste Lubricant 1 Kg [2.20 lbs.] Can	17
70-8535	Metal Paste Lubricant 350 g [12.34 oz.] Can	17
70-86	Lubrifiant Céramique 400 ml [13.52 fl.oz.]	18

lanua #	Description	Dama
Item # 70-87	Description PTFE - 100 Spray 400 ml [13.52 fl.oz.]	Page 19
70-88	Synthetic Chain Cling Spray 400 ml	19
70-89	HT-Super Spray + PTFE 400 ml [13.52 fl.oz.]	20
70-91	Contact spray 400ml.	38
70-97	Impregnation spray 400ml.	13
70-98	Crack & Porosity Detection Set (3 Units)	14
70-9801	Crack & Prosity Det. Special Cleaner (Blue)	14
70-9802	Crack & Porosity Det. Contraster (Red)	14
70-9803	Crack & Porosity Det. Developer (White)	14
71-03	Paste de coupe	25
71-03	Nozzle Paste 250 g [8.82 oz.]	25
71-04	Biolub Paste 350 g [12.34 oz.]	31
71-0935	Biolub Paste tube 400 g [14.11 oz.]	31
71-55	-	30
74-1010	Food lube grease 200 tube 400 g [14.11 oz.] Valve pour 201.	52
		35
74-1020	Nettoyant avec micro-organismes 20 l	
75-01	NSF Stainless St. Care Spray 400 ml	32
75-0304	Cutting Oil for Metals 41 [1.32 gal.]	25
75-0320 75-0345	Cutting Oil for Metals 201 [5.28 gal.] Cutting Oil for Metals 205 5	25
	5	25
75-0401	Multi-TS Anti-Spatter Fluid 960 ml [32.46 fl.oz.]	27
75-0404	Multi-TS Anti-Spatter Fluid 4 [1.06 gal.]	27
75-0420	Multi-TS Anti-Spatter Fluid 20 [5.28 gal.]	27
75-0445	Multi-TS Anti-Spatter Fluid 205 I [54.15 gal.]	27
75-11	NSF K1 Rapid Cleaner Spray 400 ml	32
75-17	Citrus Cleaner Spray 400 ml [13.52 fl.oz.]	37
75-18	Glass Cleaner Spray 400 ml [13.52 fl.oz.]	46
75-2601	Rust-Killer 960 ml [32.46 fl.oz.]	39
75-2604	Rust-Killer 4 [[1.06 gal.]	39
75-2620	Rust-Killer 201 [5.28 gal.]	39
75-2645	Rust-Killer 205 I [54.15 gal.]	39
75-2700	Intensive Detergent 500 ml [16.91 fl.oz.]	37
75-2704	Intensive Detergent 4 [1.32 gal.]	37
75-2720	Intensive Detergent 20 I [5.28 gal.]	37
75-2745	Intensive Detergent 200 I [52.83 gal.]	37
75-2799	vaporisateur / pompe solvant	52
75-2900	Power Cleaner (concentrate) 500 ml	36
75-2902	Power Cleaner (concentrate) 200 l	nd
75-2910	Power Cleaner (concentrate) 10 [2.64 gal.]	36
75-2920	Power Cleaner (concentrate) 201 [5.28 gal.]	36
75-3000	Ultra Power Cleaner (Conc.) 500 ml	36
75-3010	Ultra Power Cleaner (Conc.) 10 l [2.64 gal.]	36
75-3020	Ultra Power Cleaner (Conc.) 20 l [5.28 gal.]	36
75-3099	Sprayer Bottle (Alkali Cleaners) 1.5 l	52
75-3199	Sprayer Bottle (Neut. & Acid Cl.) 1.5 l	52
75-3301	CC 80 Multifunction Oil 1 [33.81 fl.oz.]	11
75-3304	CC 80 Multifunction Oil 41 [2.64 gal.]	11
75-3320	CC 80 Multifunction Oil 20 I [5.28 gal.]	11
75-3345	CC 80 Multifunction Oil 205 I [52.83 gal.]	11
	Class and Cal 2001 [52 02 and]	39
75-4402	Clean-nox Gel 200 l [52.83 gal.]	
75-4402 75-4404 75-4420	Clean-nox Gel 2001 [52:83 gal.] Clean-nox Gel 41 4 Clean-nox Gel 201 [5:28 gal.]	39 39 39

ltem #	Description	Page
75-5600	Stainless Steel Care Cleaner 500 ml [16.91 fl.oz.]	39
75-5601	Stainless Steel Care Cleaner 960ml	39
75-5602	Stainless Steel Care Cleaner 200 l [52.83 gal.]	39
75-5604	Stainless Steel Care Cleaner 4 litres	39
75-5620	Stainless Steel Care Cleaner 20 [5.28 gal.]	39
75-60	Citrus Cleaner K1 NSF	32-37
75-6404	Kowa Protect Wax 4 .	10
75-6420	Kowa Protect Wax 20 l	10
75-7701	Universal cleaner NSF 4 [1.06 gal.]	30
75-7704	Universal cleaner NSF 201 [5.28 gal.]	30
75-7720	Universal cleaner NSF 205 [[54.15 gal.]	30
75-82	Hand Protection Cream 100 ml [3.38 fl.oz.]	52
	Neutralisateur d'Odors 600ml.	
75-83		40
75-88	Citrus en gel 400ml.	37
76-0001	Ametaclean 960 ml [32.46 fl.oz.]	35
76-0004	Ametaclean 4 I [1.06 gal.]	35
76-0020	Ametaclean 201 [5.28 gal.]	35
76-0045	Ametaclean 205 [54.15 gal.]	35
76-0301	Bio-Zone+ 960 ml [32.46 fl.oz.]	40
76-0304	Bio-Zone+ 4 I [1.06 gal.]	40
76-0320	Bio-Zone+ 201 [5.28 gal.]	40
76-0345	Bio-Zone+ 205 I [54.15 gal.]	40
76-0501	Tob-Clean 960 ml [32.46 fl.oz.]	37
76-0504	Tob-Clean 41 [1.06 gal.]	37
76-0520	Tob-Clean 201 [5.28 gal.]	37
76-0545	Tob-Clean 205 I [54.15 gal.]	37
76-1301	CONDITIONER leather 960 ml [32.46 fl.oz.]	46
76-1401	Ultra-Mag 960 ml [32.46 fl.oz.]	43
76-1404	Ultra-Mag 41 [1.06 gal.]	43
76-1420	Ultra-Mag 201 [5.28 gal.]	43
76-1501	Ultra-Mag acide 960 ml [32.46 fl.oz.]	43
76-1504	Ultra-Mag_acide 4 I [1.06 gal.]	43
76-1520	Ultra-Mag acide 20 l [5.28 gal.]	43
76-1601	Boat-out ACIDE 960 ml [32.46 fl.oz.]	44
76-1604	Boat-out ACIDE 41 [1.06 gal.]	44
76-1620	Boat-out ACIDE 20 I [5.28 gal.]	44
76-1645	Boat-out ACIDE 205 I [54.15 gal.]	44
76-1701	Boat-In 960 ml [32.46 fl.oz.]	44
76-1704	Boat-In 41 [1.06 gal.]	44
76-1720	Boat-In 201 [5.28 gal.]	44
76-1745	Boat-In 205 [54.15 gal.]	44
76-1801	Boat-Out 960 ml [32.46 fl.oz.]	44
76-1804	Boat-Out 41 [1.06 gal.]	44
76-1820	Boat-Out 201 [5.28 gal.]	44
76-1845	Boat-Out 205 [54.15 gal.]	44
76-1901	Bug Remover 960 ml [32.46 fl.oz.]	43
76-1904	Bug Remover 41 [1.06 gal.]	43
76-1920	Bug Remover 201 [5.28 gal.]	43
76-1945	Bug Remover 205 [54.15 gal.]	43
76-2001	Green Polish 960 ml [32.46 fl.oz.]	45
76-2004	Green Polish 4 [1.06 gal.]	45
76-2025	Green Polish 250 ml [8.45 fl.oz.]	45
		.5

ltem #	Description	Page
76-2101	Description White Polish 960 ml [32.46 fl.oz.]	Page 45
76-2104	White Polish 41 [1.06 gal.]	45
76-2104	White Polish 41 [1.06 gal.]	45
76-2125	White Polish 250 ml [8.45 fl.oz.]	45
76-2301	Nettoyant vitres 1 [33.81 fl.oz.]	46
76-2304	Nettoyant vitres 4 [1.06 gal.]	40
76-2304	Nettoyant vitres 20 [5.28 gal.]	40
	,	
76-2345 76-2401	Nettoyant vitres 205 [54.15 gal.]	46
76-2401	Engine Clean Green 960 ml [32.46 fl.oz.]	43 43
76-2404	Engine Clean Green 41 [1.06 gal.]	43
76-2420	Engine Clean Green 201 [5.28 gal.]	
	Tapis'NET 960 ml [32.46 fl.oz.]	44
76-2504	Tapis'NET 4 [1.06 gal.]	44
76-2520	Tapis'NET 20 [5.28 gal.]	44
76-2545	Tapis'NET 205 [54.15 gal.]	44
76-2801	Engine Clean+ Blue 960 ml [32.46 fl.oz.]	43
76-2804	Engine Clean+ Blue 41 [1.06 gal.]	43
76-2820	Engine Clean+ Blue 20 I [5.28 gal.]	43
76-3101	M. T. Clean 960 ml [32.46 fl.oz.]	35
76-3104	M. T. Clean 41 [1.06 gal.]	35
76-3120	M. T. Clean 201 [5.28 gal.]	35
76-3145	M. T. Clean 205 l [54.15 gal.]	35
76-4601	Remover (Citrus) 960 ml [32.46 fl.oz.]	37
76-4604	Remover (Citrus) 41 [1.06 gal.]	37
76-4620	Remover (Citrus) 20 l [5.28 gal.]	37
76-4645	Remover (Citrus) 205 l [54.15 gal.]	37
76-47	Ameta-Extra 20 Kg [44.09 lbs.]	38
76-4804	Clean-lt 41 [1.06 gal.]	51
76-4820	Clean-It 201 [5.28 gal.]	51
76-4901	Remover Eco (Citrus) 960 ml [32.46 fl.oz.]	37
76-4904	Remover Eco(Citrus) 41 [1.06 gal.]	37
76-4920	Remover Eco (Citrus) 20 I [5.28 gal.]	37
76-4945	Remover Eco (Citrus) 205 l [54.15 gal.]	37
76-70	Gel Protect 1 [33.80 fl.oz.]	28
76-8601	Alu-Inox Cleaner 960 ml [32.46 fl.oz.]	36
76-8604	Alu-Inox Cleaner 41 [1.06 gal.]	36
76-8620	Alu-Inox Cleaner 20 I [5.28 gal.]	36
76-8645	Alu-Inox Cleaner 205 I [54.15 gal.]	36
76-8701	Dec'alu 1 960 ml [32.46 fl.oz.]	36
76-8704	Dec'alu 41 [1.06 gal.]	36
76-8720	Dec'alu 20 l [1.06 gal.]	36
76-8745	Dec'alu 205 l	36
76-9001	Revolution 1 [33.81 fl.oz.]	45
76-9004	Revolution 41 [1.06 gal.]	45
76-9020	Revolution 201 [5.28 gal.]	45
76-9045	Revolution 205 [54.15 gal.]	45
76-9301	Savon Béton 960 ml [32.46 fl.oz.]	36
76-9304	Savon Béton 41 [1.06 gal.]	36
76-9320	Savon Béton 201[5.28 gal.]	36
76-9345	Savon Béton 205 l [54.15 gal.]	36
76-9401	Fast Clean 1 [33.81 fl.oz.]	35
76-9404	Fast Clean 41 [1.06 gal.]	35
	5 -	

	Description	D
Item #	Description	Page
76-9420	Fast Clean 20 [5.28 gal.]	35
76-9445	Fast Clean 205 [54.15 gal.]	35
76-9501	Shampoo Foam with Wax 1 [33.81 fl.oz.]	43
76-9504	Shampoo Foam with Wax 41 [1.06 gal.]	43
76-9520	Shampoo Foam with Wax 201 [5.28 gal.]	43
76-9545	Shampoo Foam with Wax 205 I [54.15 gal.]	43
76-9701 76-9704	Wax carnauba 960 ml [32.46 fl.oz.]	45
	Wax carnauba 4 l [1.06 gal.] Wax carnauba 20 l [5.28 gal.]	45
76-9720		45
76-9801	Ez-Wax 960 ml [32.46 fl.oz.]	45
76-9804	Ez-Wax 4 I [1.06 gal.]	45
76-9820 76-9845	Ez-Wax 20 [5.28 gal.]	45 45
	Ez-Wax 205 [54.15 gal.]	
76-9901	Black-It 960 ml [32.46 fl.oz.]	46
76-9904	Black-It 4 [[1.06 gal.]	46
76-9920	Black-lt 20 l [5.28 gal.] Black-lt 205 l	46 46
76-9945 77-0301		40
77-0304	Bio-Zone 960 ml [32.46 fl.oz.] Bio-Zone 4 l [1.06 gal.]	40
77-0304	Bio-Zone 201 [5.28 gal.]	40
77-0345	Bio-Zone 205 [54.15 gal.]	40
77-0401	Bio-Zone Cuir 960 ml [32.46 fl.oz.]	46
77-0404	Bio-Zone Cuir 41 [1.06 gal.]	40
77-0404	Bio-Zone Cuir 201 [5.28 gal.]	46
78-0110	Lock-It System Blue (Med. St.) 10 ml	28
78-0125	Lock-It System Blue (Med. St.) 250 ml	28
78-0150	Lock-It System Blue (Med. St.) 50 ml	28
78-0210	Lock-It System Red (High St.) 10 ml	28
78-0225	Lock-It System Red (High St.) 250 ml	28
78-0250	Lock-It System Red (High St.) 50 ml	28
79-01	Porta Combi-Zinc Spray 400 ml [13.52 fl.oz.]	4
79-02	Porta Brake Cleaner Spray 750 ml	37
79-03	Porta Silicone Spray 400 ml [13.52 fl.oz.]	20
79-04	Porta Anti-Spatter Spray 400 ml [13.52 fl.oz.]	27
79-06	Porta Zinc Spray 400 ml [13.52 fl.oz.]	3
79-08	Porta Freeze Spray 400 ml [13.52 fl.oz.]	14
79-09	Porta Multi-P. Rust-Rem. S. 400 ml	14
79-11	Porta Adehsion Power 400 ml [13.52 fl.oz.]	20
79-1501	Brake Cleaner (bulk) 960 ml [32.46 fl.oz.]	37
79-1504	Brake Cleaner (bulk) 4 l [1.06 gal.]	37
79-1520	Brake Cleaner (bulk) 20 l [5.28 gal.]	37
79-1545	Brake Cleaner (bulk) 205 l	37
R23-400	960ml. Bottle And Spray	52

ALSO AWAILABLE:

